
DropTopTMSingle 32 Light

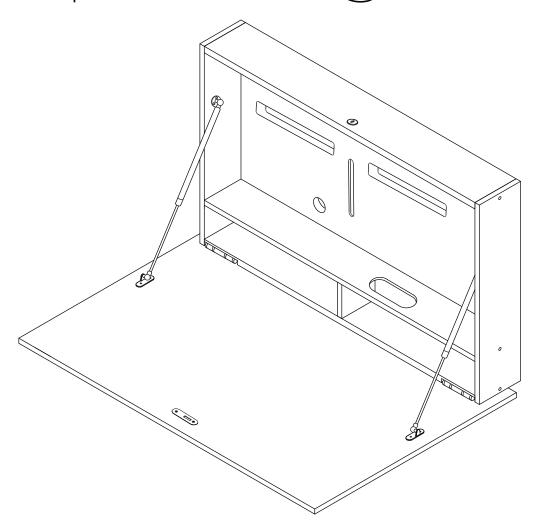

Assembly & Installation Instructions

DropTopTMSingle 32 Light


Assembly & Installation Guidelines

Please read and follow these instructions carefully to ensure the correct assembly and installation of your Drop™ wall-mounted desk. Failure to adhere to the instructions may result in product damage, personal injury, or voiding of the product warranty.


Before You Begin:

- Remove the contents from the package and place them on a protective surface to prevent damage.
- Compare the package contents with the Supplied Parts List to ensure all components are intact and undamaged.
- Thoroughly read and review all instructions provided in your DropTop™ Installation guide before beginning assembly.


If you encounter any issues or have questions during the assembly process, please contact our customer support team for assistance.

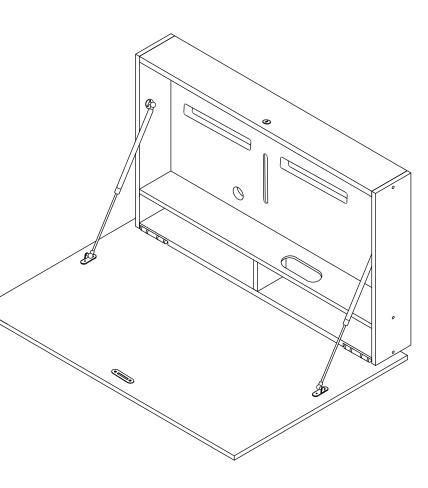


DropTop™ Single 32 Light Fixings Pack

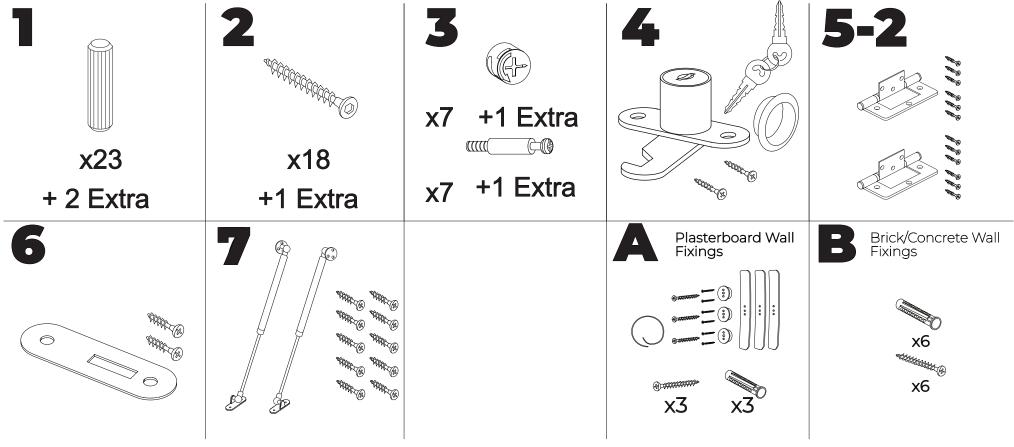



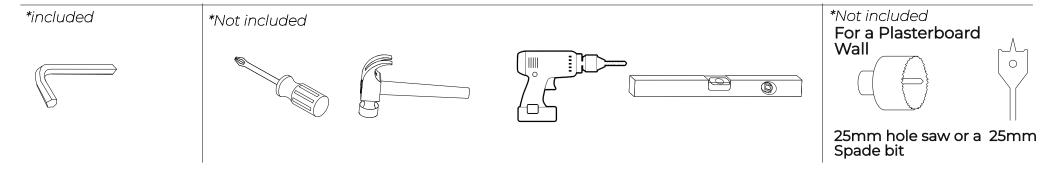

DropTop™ Single 32 Light Parts.

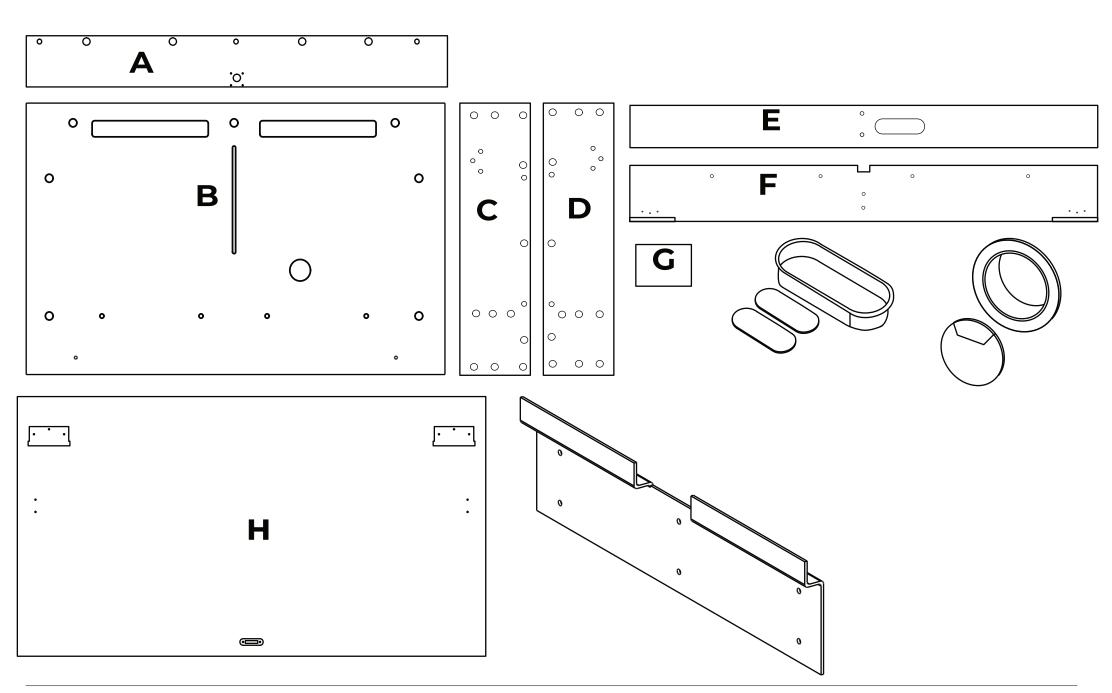

Page: 4

DropTop™ Single 32 Light dimensions.

Exterior dimensions when Closed:

Height: 79 cm

Width: 87.5 cm

Depth: 15.8cm

Worktop Dimensions:

Width: 68.5 cm

Depth: 93.5 cm

The Single 32 Light supports

up to 50kg in weight

Weight - 25kg

To safely mount your




DropTop™, it is



people assist with the

installation

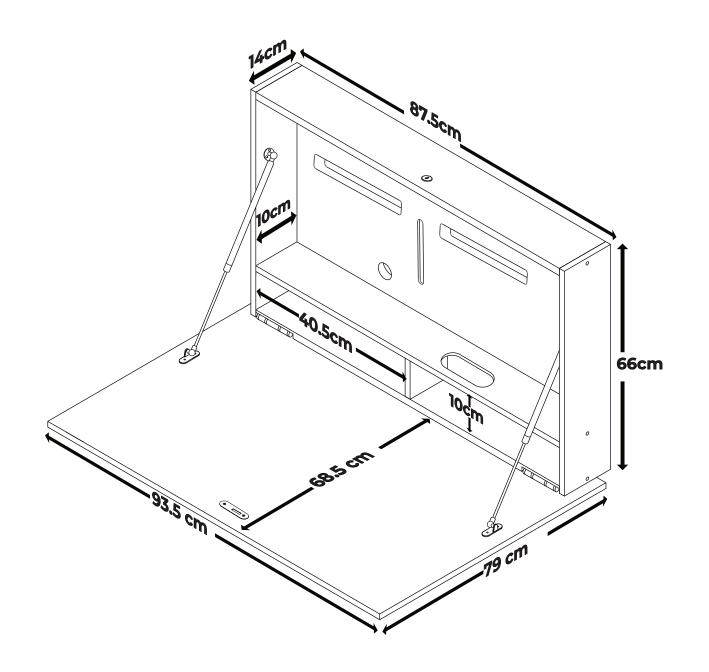

DropTop™ Single 32 Light Monitor space dimensions

The Single Light 32 is designed to house a 32-inch monitor.

Available Monitor Space dimensions:

Height: 38cm


Width: 78.5cm

Depth: Please see note below*




Please note that the available monitor space depth will vary based on your chosen Monitor Mount

Monitor Mount	Depth available
Extendable	5cm
Tilt	6cm
Slim	8cm

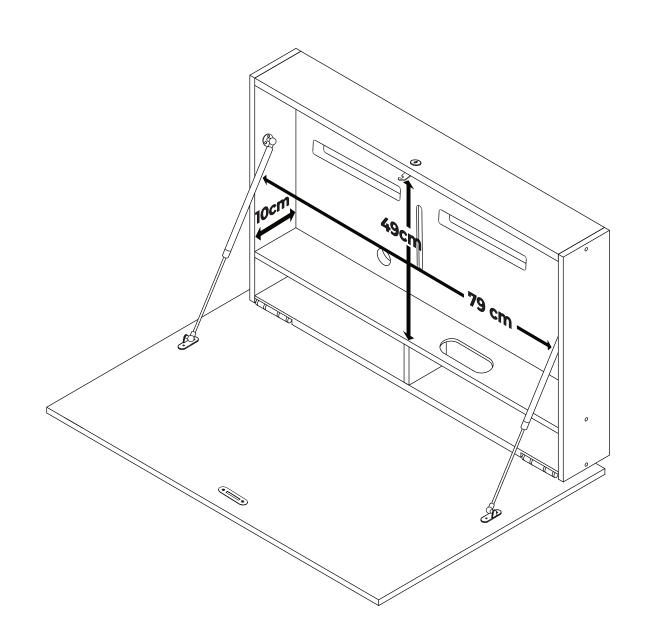

Monitor Mounts.

Your DropTop™ Light will include one of the following monitor brackets, depending on your order configuration.

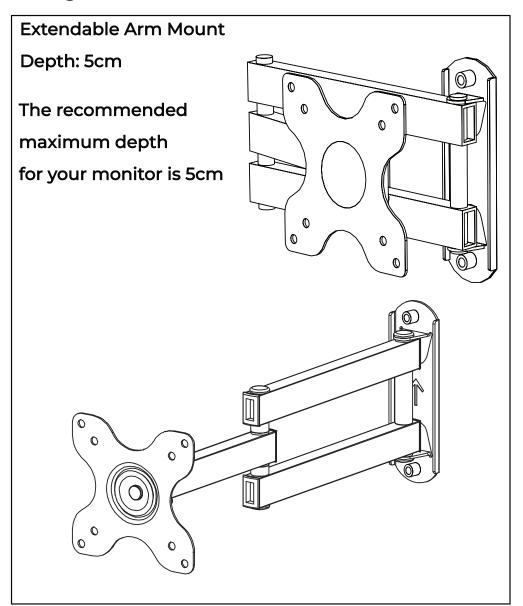


Slim Mount

Depth: 1.3cm

The recommended

maximum depth


for your monitor is 8cm

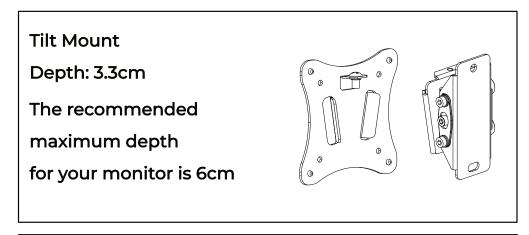




Ensure your monitor supports VESA
75x75mm or 100x100mm standards and
check the advised depth for each mount.


DropTop™ Single 32 Light Wall Plate

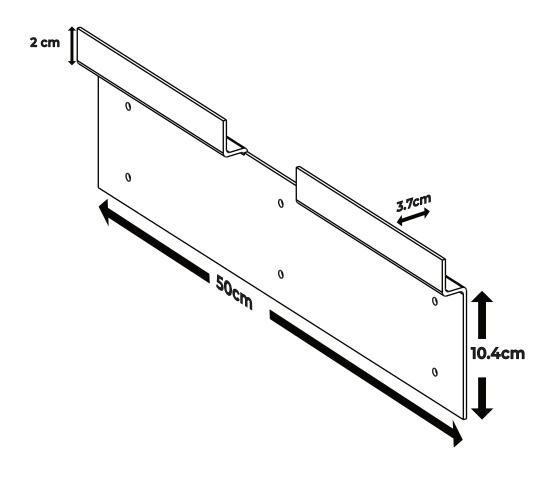


DropTop™ Single 32 Light Cable Management

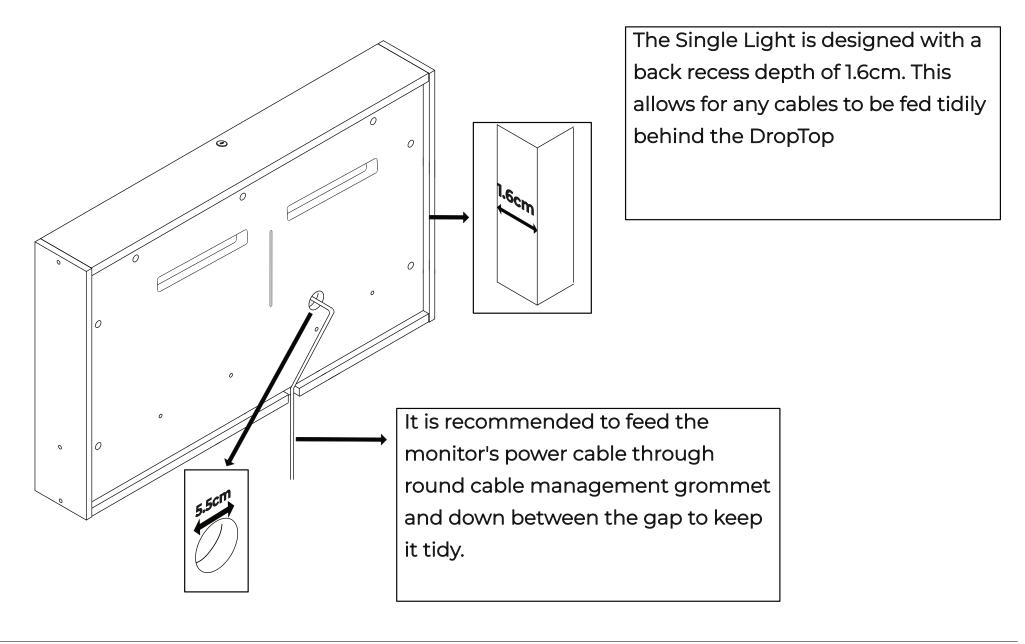


DropTop™ Single 32 Light Assembly.

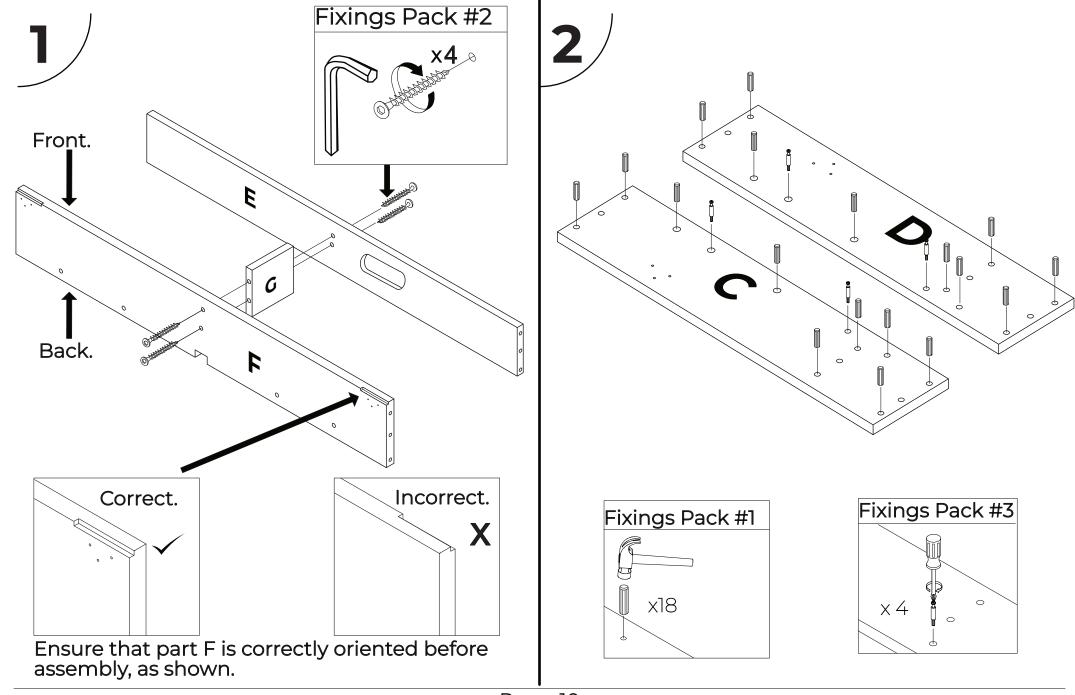


Page: 10

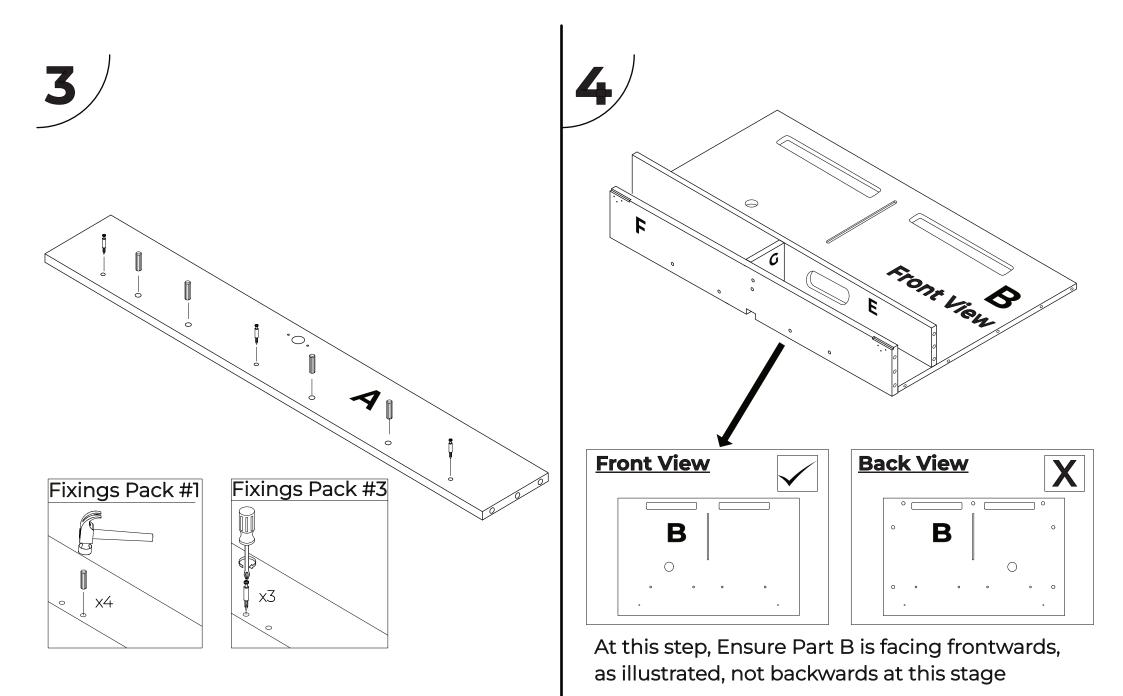


Page: 11

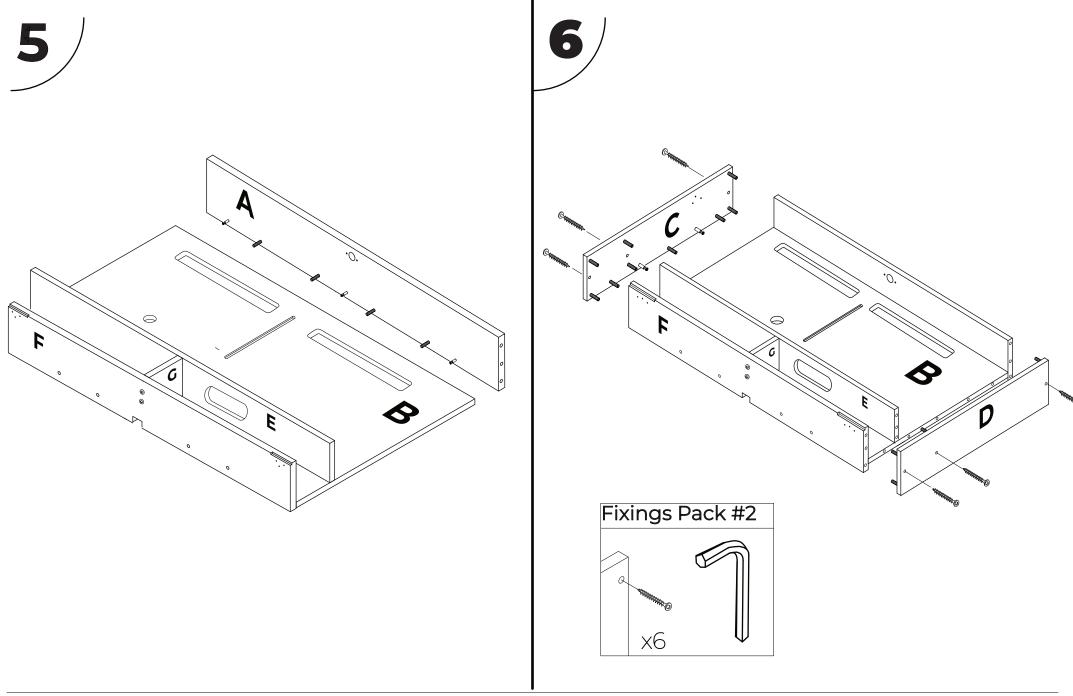


Page: 12

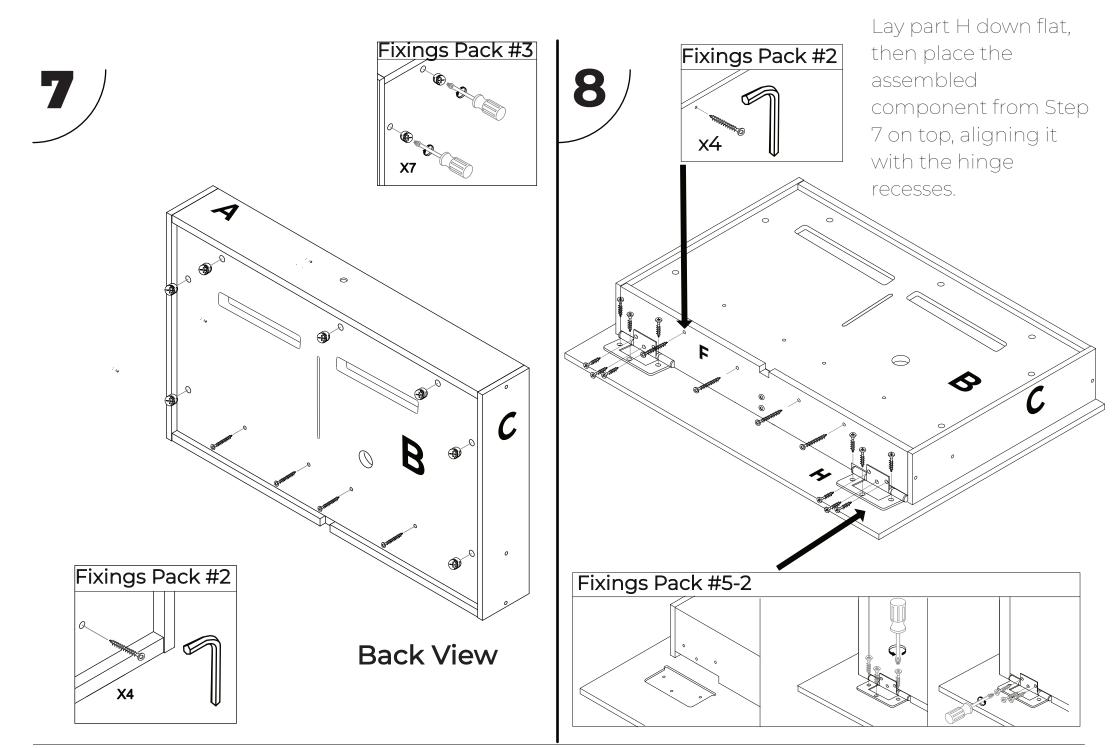


Page: 13

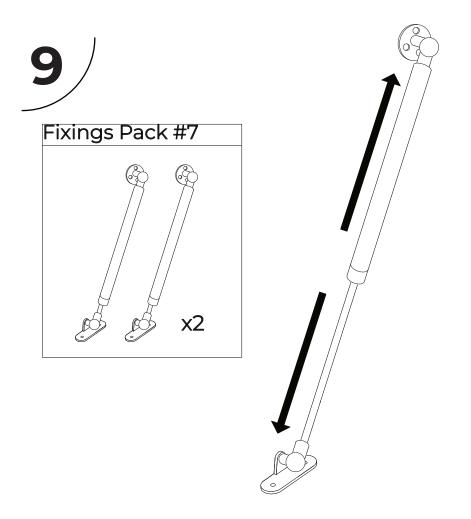

Fully extend the soft opening stays by pulling on each end.

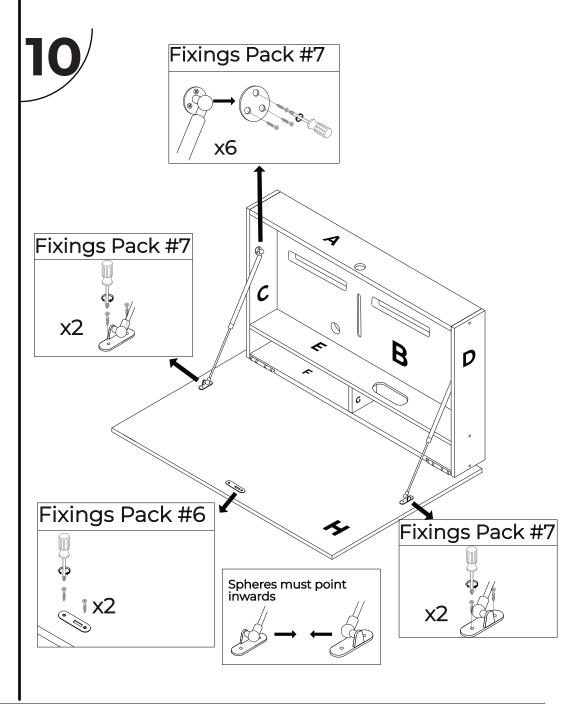


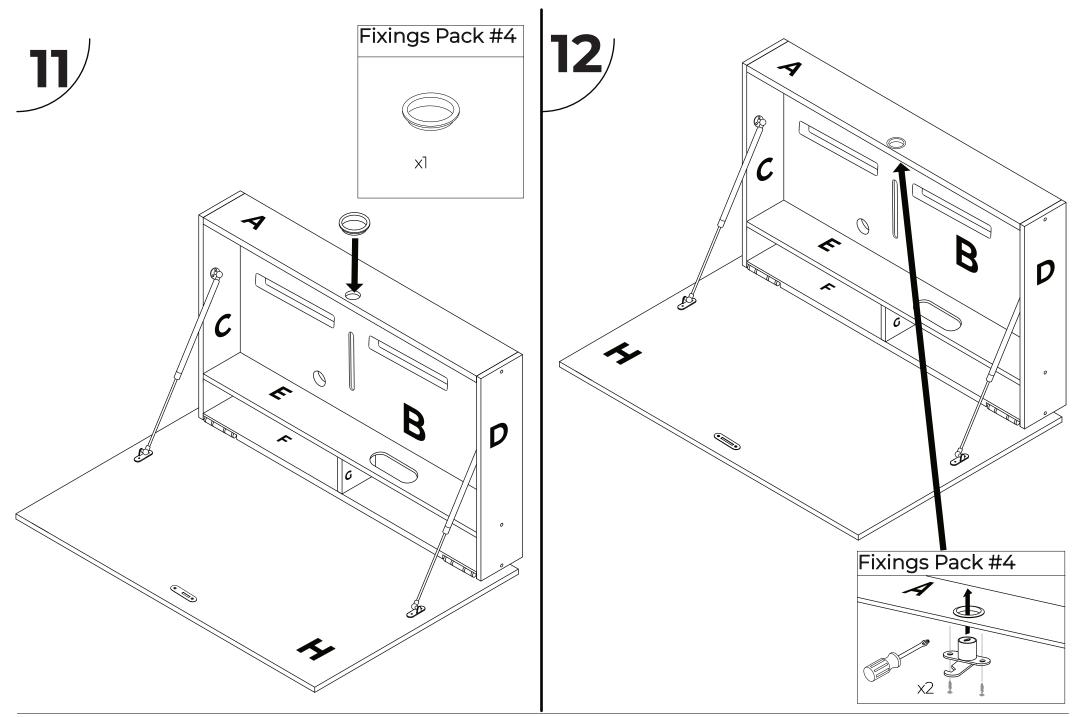

Page: 15

13

Oval Cable management grommet.

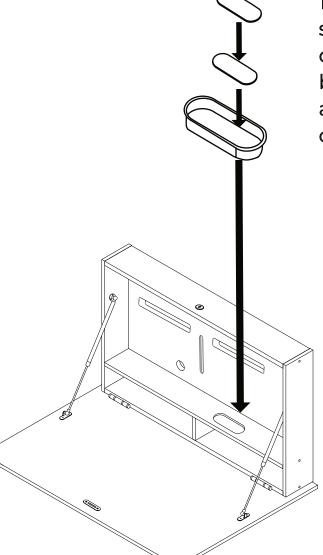


1. Place the two slender metal discs into the black oval ring, aligning them correctly.

2. Slot the assembled cable management unit into the oval recess


14


Round Cable management grommet.

1. Push out the central section of the circular cable grommet. You'll use it later.



2. Fit the outer ring of the cable grommet into part B's circular recess, aligning it carefully

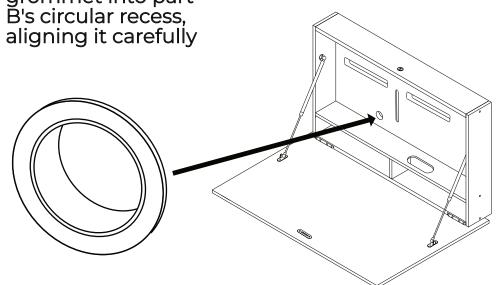

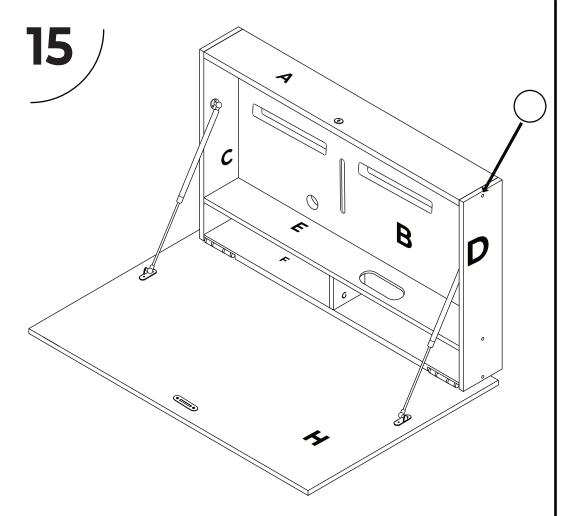


Matching colour cover cap stickers have been provided with your DropTop™


Place the provided colour-matched cover cap stickers over any exposed screws for a clean finish.


To install your monitor on a Slim or Tilt mount.




Your DropTop™ comes with either a Slim Monitor Mount or a Tilt Monitor Mount, depending on your chosen configuration.

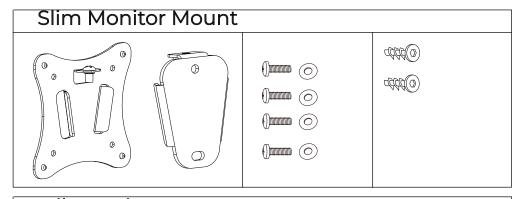

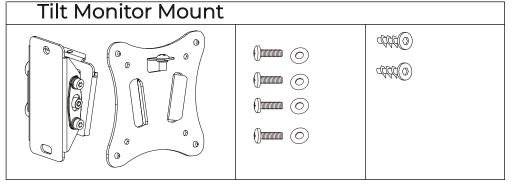

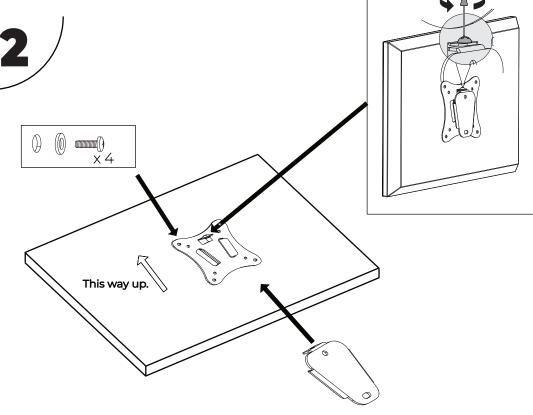

Fix the VESA plate to the monitor with the supplied screws.

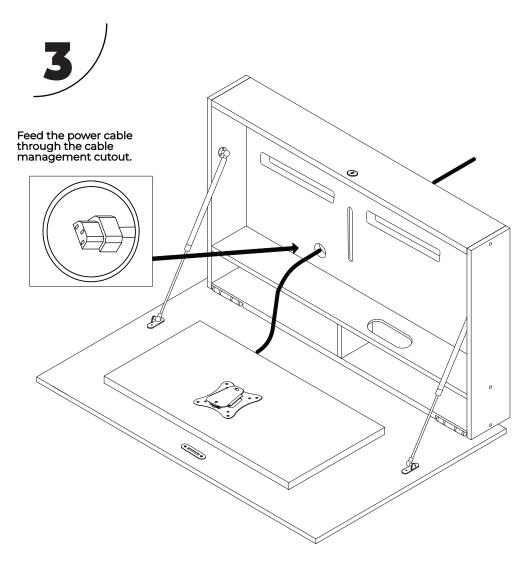


Place the monitor face down on the worktop.

Feed the power cable through the round cable grommet at the back of panel B and plug it into your monitor.




Attach your selected cable to the monitor and pass it through the oval-shaped cable grommet on panel E.

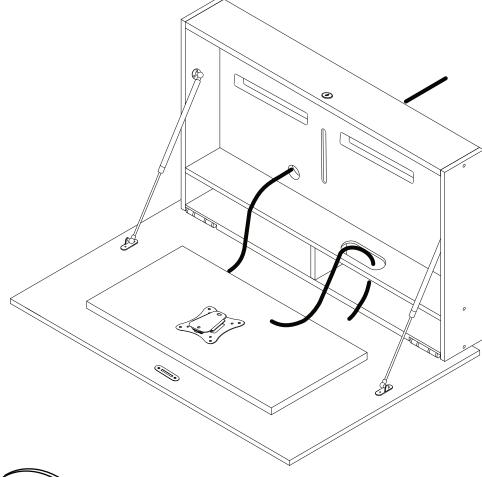




After cabling, reattach the central section to the round cable grommet.

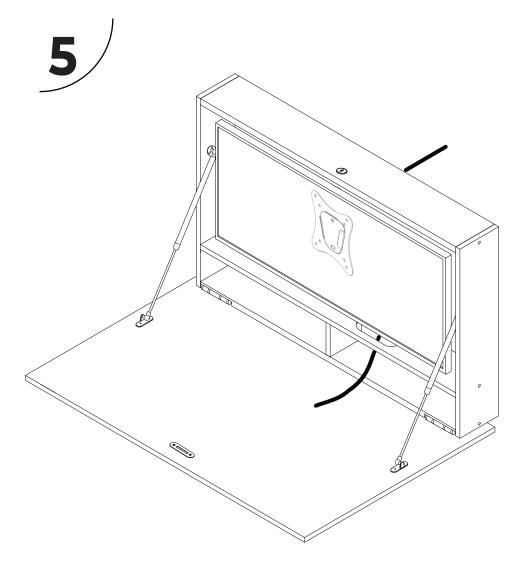


Place your monitor into the DropTop™ monitor space, ensuring cables are properly routed through.

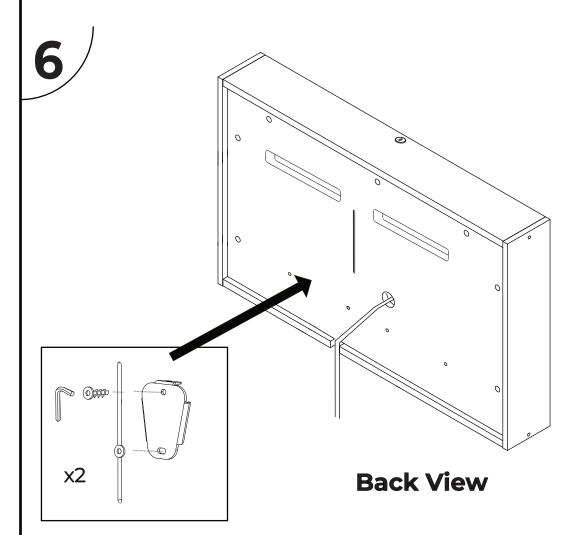


Secure the monitor from the front. At the back, insert and lightly screw the bolts to keep it in position. Fine-tune the height as needed, then fully tighten the bolts to firmly secure the monitor.


To install your monitor on an Extendable Arm Mount

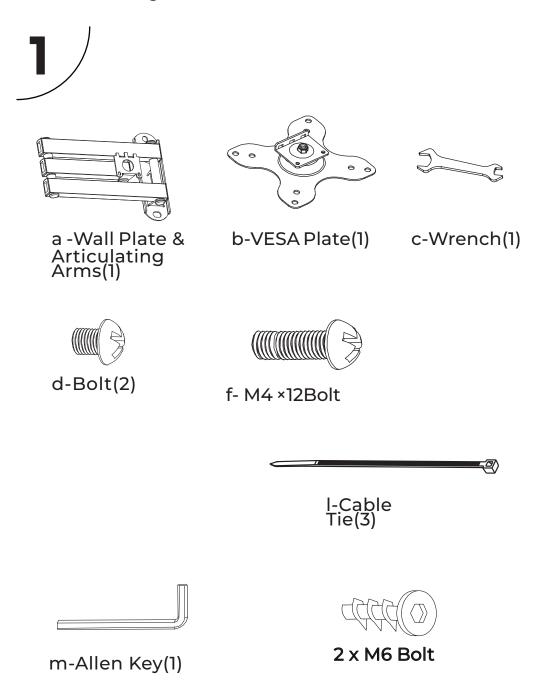




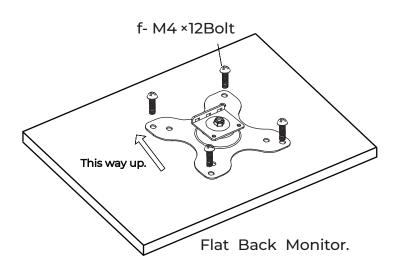

Attach the VESA Plat-b to your monitors using the provided screws.

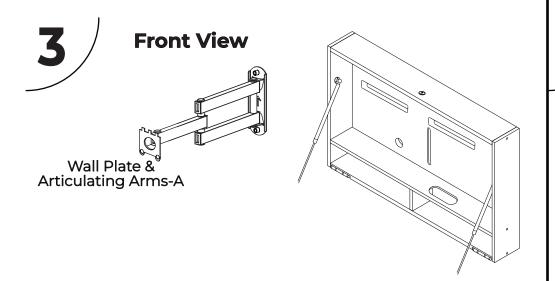


Back View

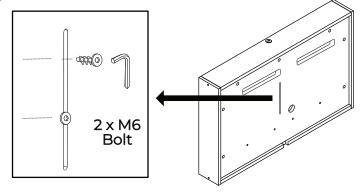

Attach the Wall Plate & Articulating Arms-A to the VESA slot on the back of the DropTop, using the 2 x M6 bolts provided.




Fully extend the articulating arms out.

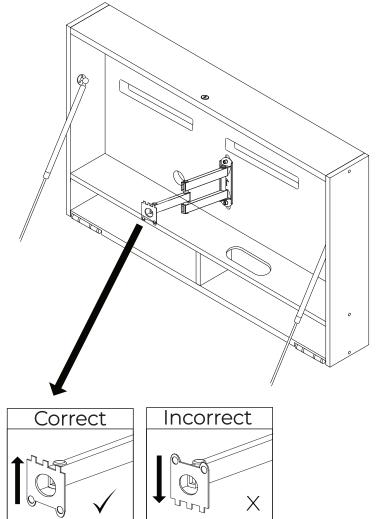


At this step, ensure the extendable mount is positioned the correct way up, as shown in the illustration.


Page: 22

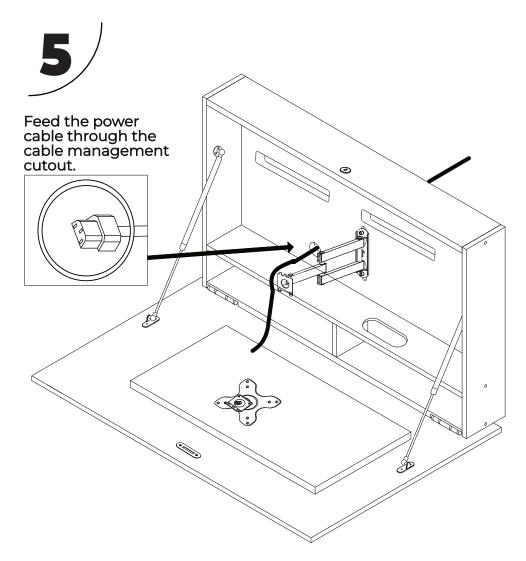

Place the monitor face down on the worktop.


Feed the power cable through the round cable grommet at the back of panel B and plug it into your monitor.

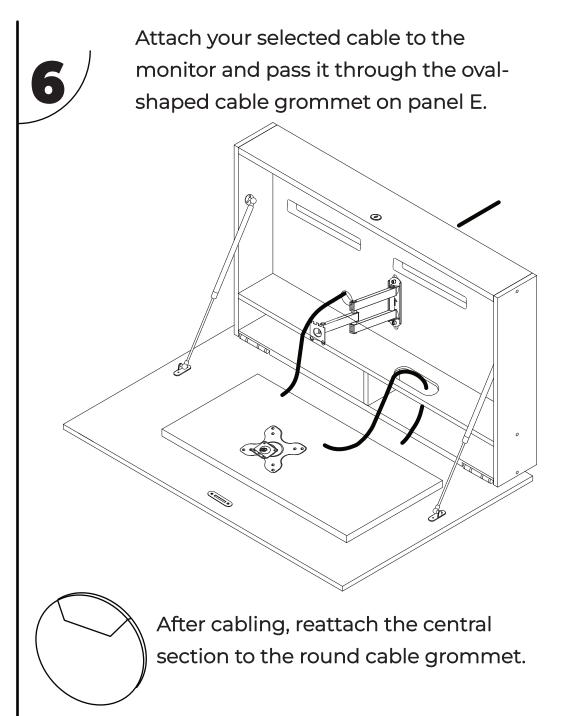

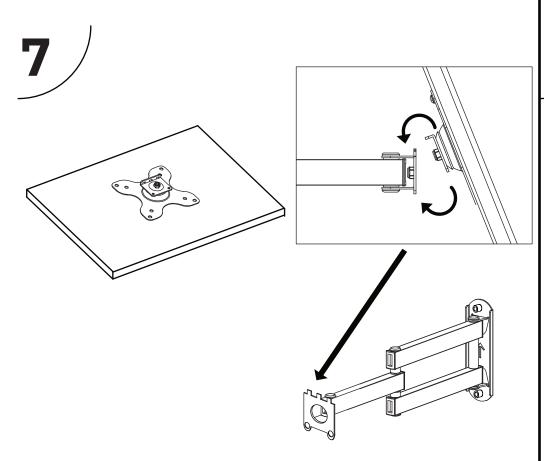


Hook the VESA Plate-b to the Socket on the fully extended arms.



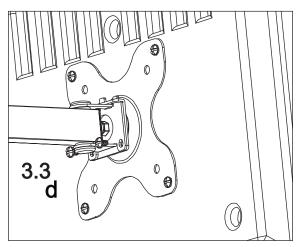




Secure the VESA
Plate-b to the
articulating arm
using the 2x M4 Boltd provided.

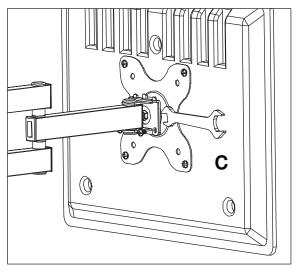


Use the wrench provided to adjust the tilting angle of the VESA Plate-b.



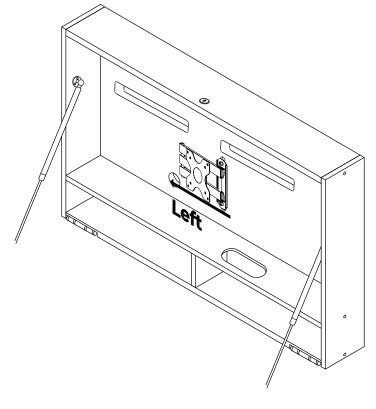

The mount brackets should be positioned as indicated in the diagram to ensure proper and mounting of the monitors.

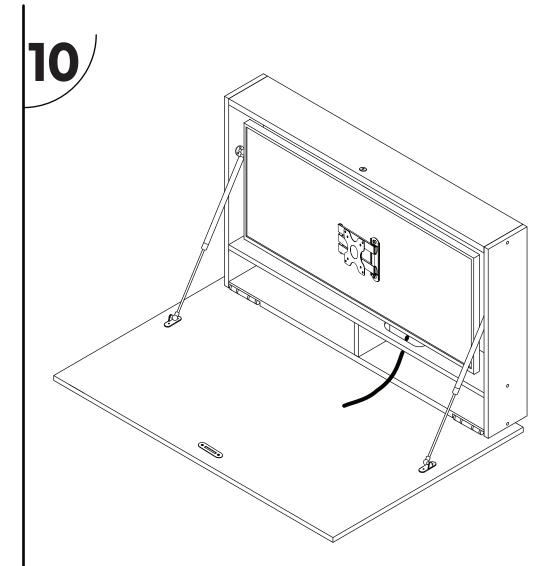


Place your monitor into the DropTop™ monitor space, ensuring cables are properly routed through.

x2 **Back View**


While securing the monitor from the front, slightly loosen the screws at the back and adjust the height as needed. Once the desired height is achieved, fully tighten the bolts to firmly secure the monitor.

Mounting the Wall plate.

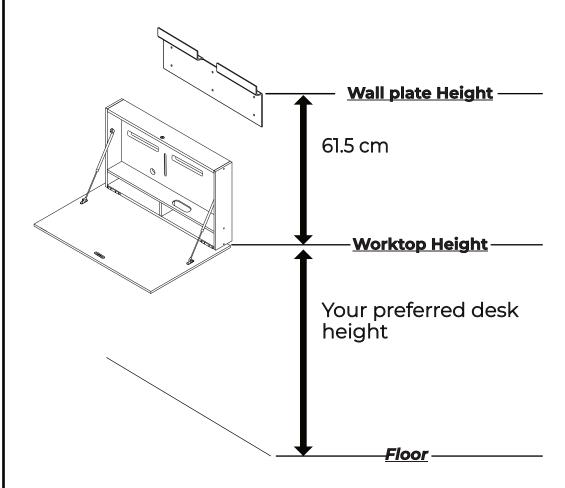


Your DropTop™ desk can be installed at any height that best suits your needs and preferences.

DropTop™ Single 32 Light Wall plate height

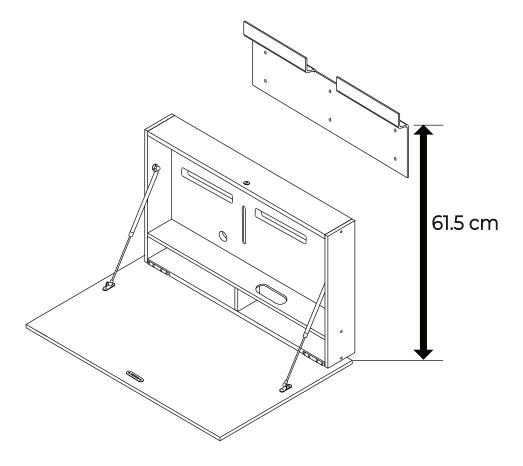


The height to install the wall plate should be measured from the top of the desired desk height to the top of the recessed area of the wall plate.

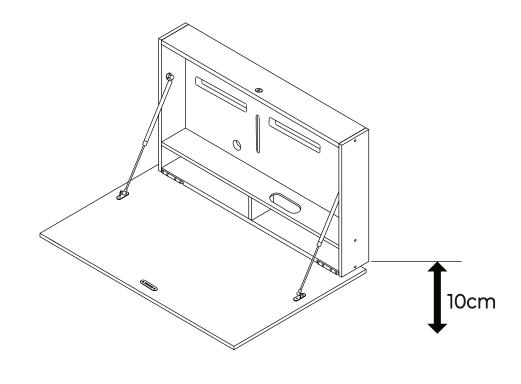




If you plan to mount the DropTop above an item, ensure there is 10 cm of clearance from the base of the DropTop™.

Installing on a brick and concrete wall.

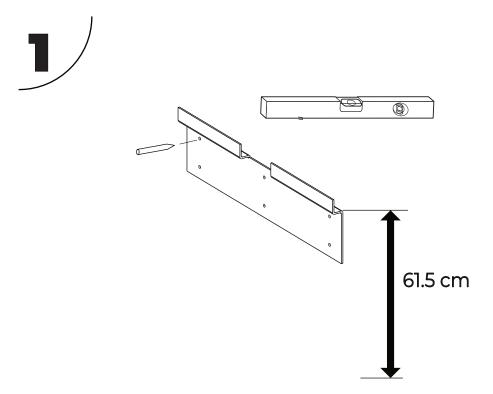



Use the wall plate as a guide and mark the position of the fixing holes with a pencil.

The height to install the wall plate should be measured from the top of the desired desk height to the top of the recessed area of the wall plate as previously explained.

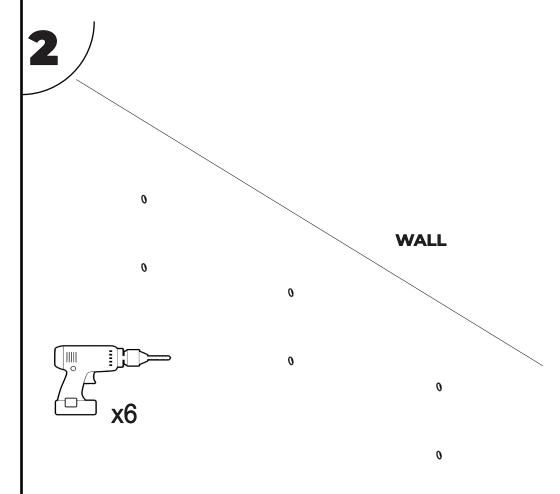


Drill 6 x 8mm sized holes at a depth of 90mm (9cm).

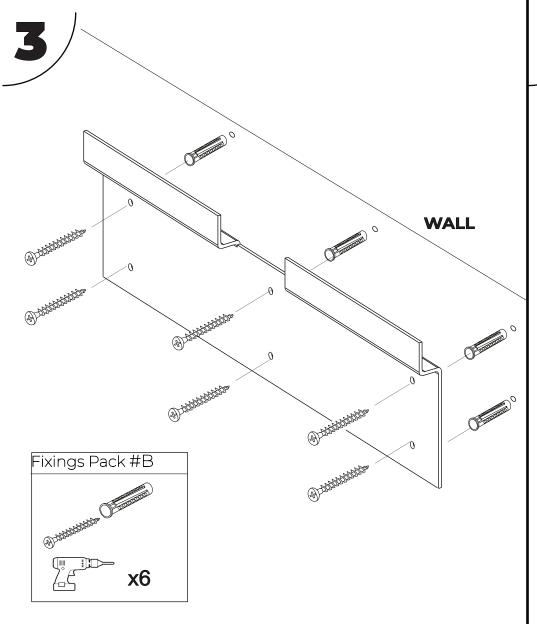

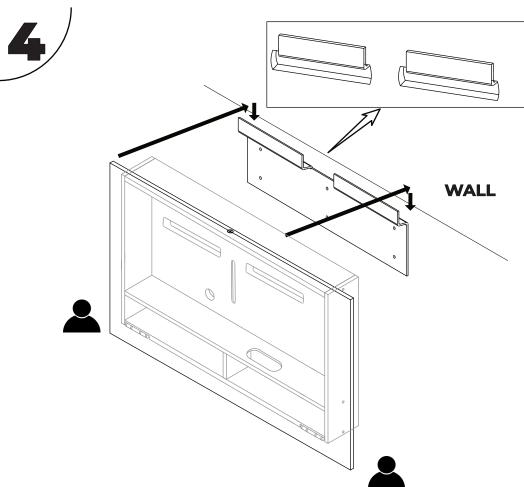


To safely mount the desk, ensure that the DropTop™ is **locked** before lifting it onto the wall plate. The DropTop™ should fit snugly in the recess of the wall plate.

Installing on Plasterboard/Drywall.

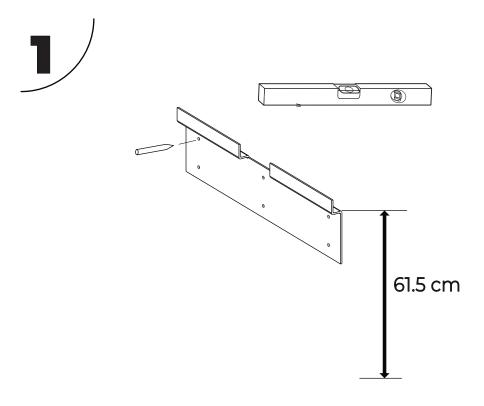


Use the wall plate as a guide and mark the position of the fixing holes with a pencil.


The height to install the wall plate should be measured from the top of the desired desk height to the top of the recessed area of the wall plate as previously explained.

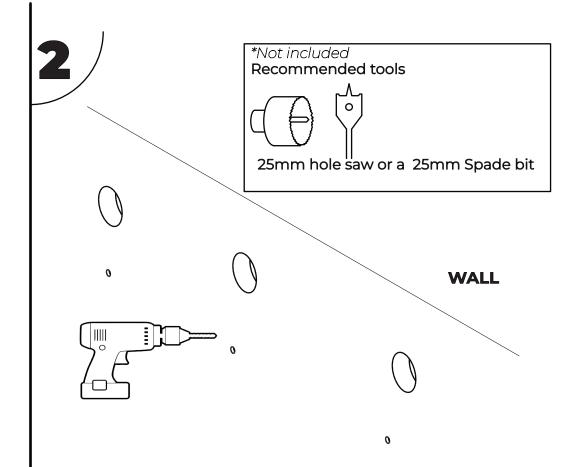

Using a hole saw, cut 3 holes of 25mm diameter centred on the top row of your wall plate pencil markings for the Geefix.

Drill 3 holes of 8mm diameter for the wall plugs.

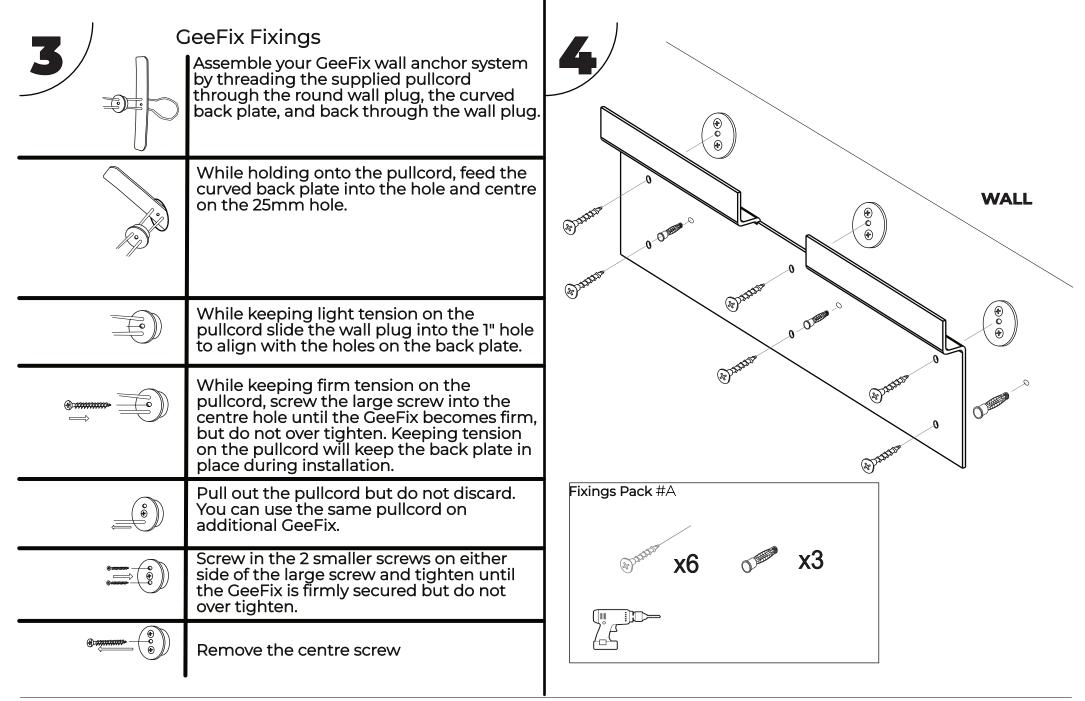


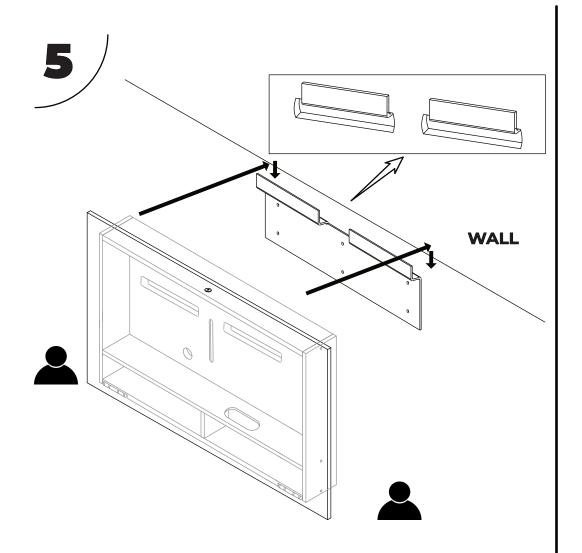

To safely mount the desk, ensure that the DropTop™ is **locked** before lifting it onto the wall plate. The DropTop™ should fit snugly in the recess of the wall plate.

DropTopTMSingle 32 Light

Thank you for choosing to purchase your Drop™ wall-mounted desk. We are delighted to have you as part of our community. You're taking a wonderful step towards improving your workspace and achieving a better work-life balance. We couldn't be more thrilled to support you in this journey.



Our team has put immense effort into designing and crafting the DropTop™ desk range to ensure it meets the highest standards of quality and functionality. We sincerely hope it transforms your workspace into a more productive and enjoyable environment.

www.pithandstem.com

© 2025 Pith & Stem Itd. All rights reserved.