


DropTop™ Duo 24 Light

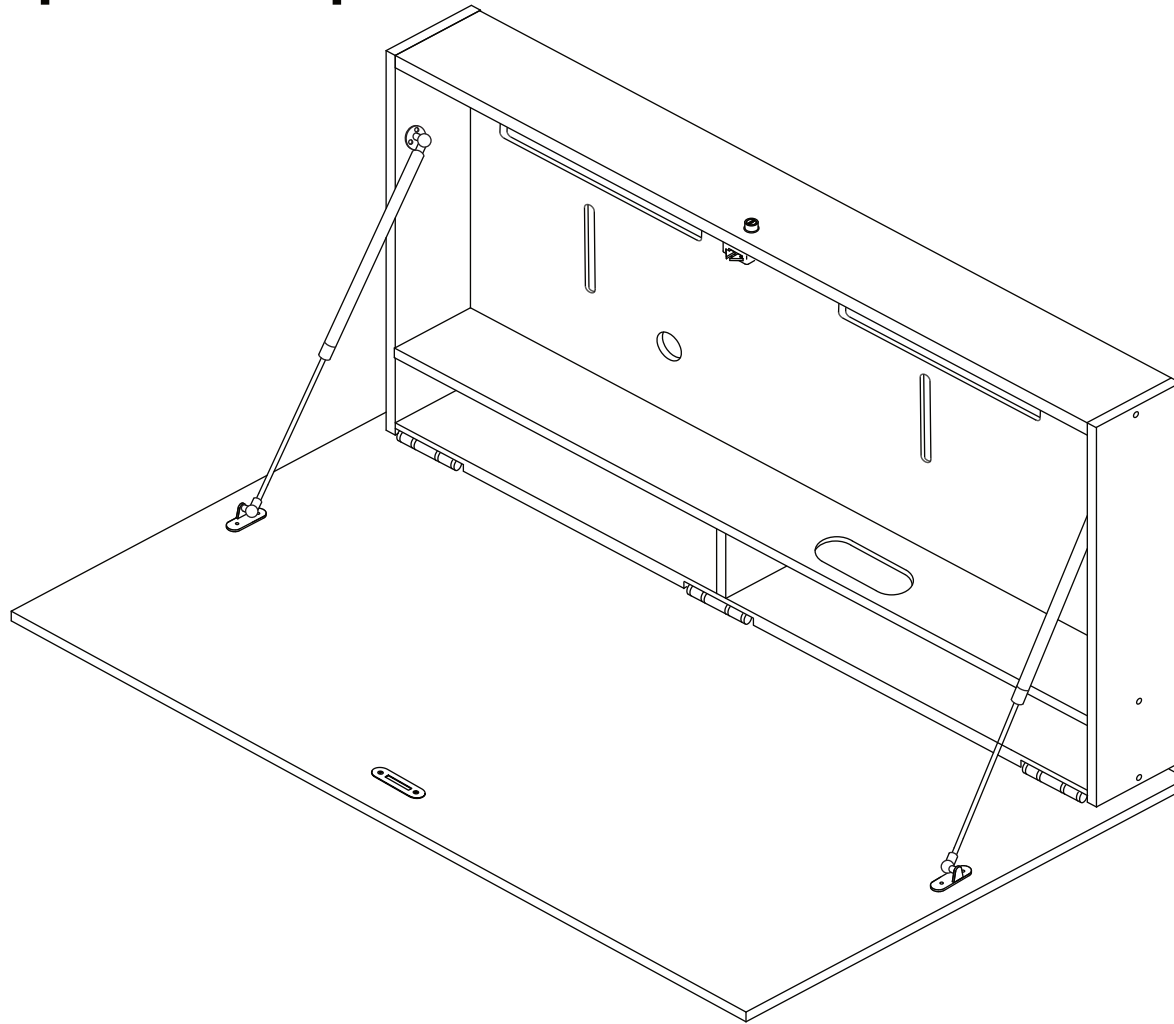

Assembly & Installation Instructions

DropTop™ Duo 24 Light


Assembly & Installation Guidelines

Please read and follow these instructions carefully to ensure the correct assembly and installation of your DropTop™ wall-mounted desk. Failure to adhere to the instructions may result in product damage, personal injury, or voiding of the product warranty.
















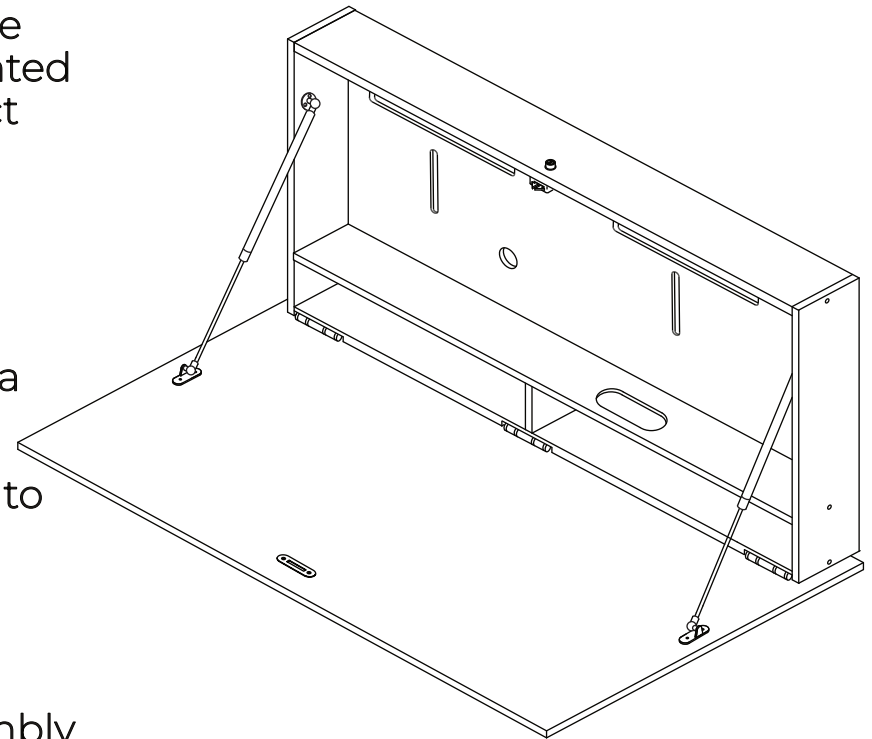







Before You Begin:

- Remove the contents from the package and place them on a protective surface to prevent damage.
- Compare the package contents with the Supplied Parts List to ensure all components are intact and undamaged.
- Thoroughly read and review all instructions provided in your DropTop™ Installation guide before beginning assembly.








If you encounter any issues or have questions during the assembly process, please contact our customer support team for assistance.

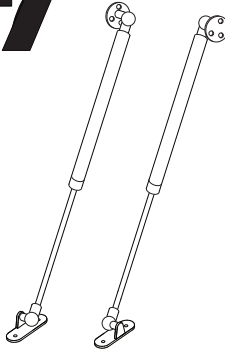


DropTop™ Duo 24 Light Fixings Pack

<div>1</div> <div>  </div> <div> x23 + 2 Extra </div>	<div>2</div> <div>  </div> <div> x18 +1 Extra </div>	<div>3</div> <div>  </div> <div> x7 +1 Extra </div> <div>  </div> <div> x7 +1 Extra </div>	<div>4</div> <div>  </div> <div>  </div> <div>  </div> <div>  </div>	<div>5-3</div> <div>  </div> <div>  </div> <div>  </div> <div>  </div>
<div>6</div> <div>  </div> <div>  </div>	<div>7</div> <div>  </div> <div>  </div>		<div>A</div> <div>Plasterboard Wall Fixings</div> <div>  </div> <div>  </div> <div>  </div> <div>  </div> <div> x5 </div> <div>  </div> <div> x5 </div>	<div>B</div> <div>Brick/Concrete Wall Fixings</div> <div>  </div> <div> x8 </div> <div>  </div> <div> x8 </div>

Tools

<div>*included</div> <div>  </div>	<div>*Not included</div> <div>  </div> <div>  </div> <div>  </div> <div>  </div>	<div>*Not included</div> <div>For a Plasterboard Wall</div> <div>  </div> <div>  </div> <div>25mm hole saw or a 25mm Spade bit</div>
---	---	--

DropTop™ Duo 24 Light Parts

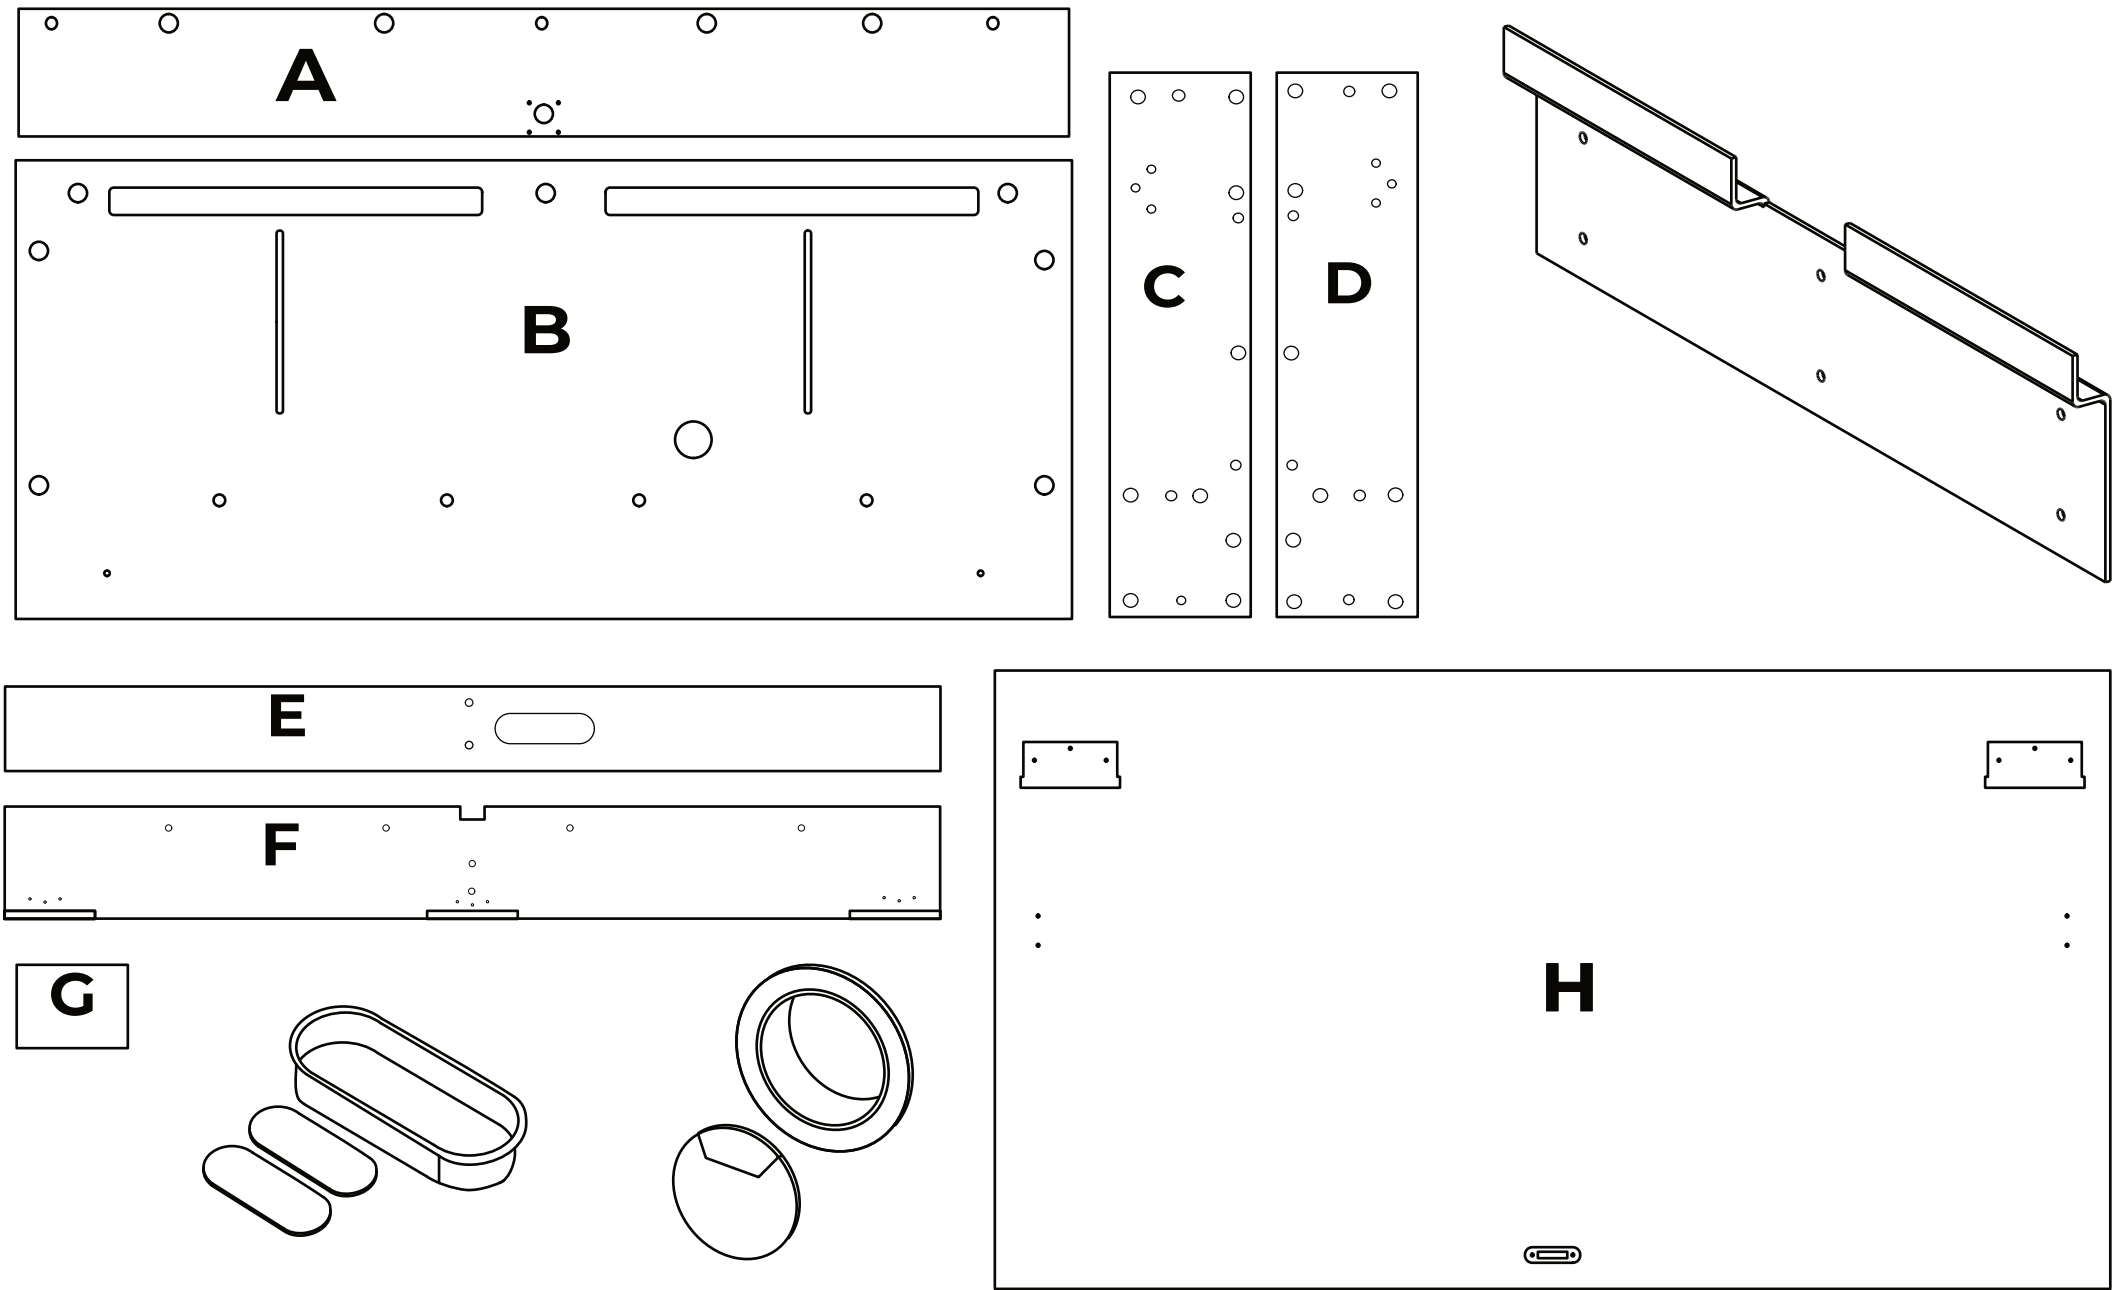

DropTop™ Duo 24 Light dimensions

Exterior dimensions when Closed:

Height: 67cm

Width: 121cm

Depth: 15.8cm

Worktop Dimensions:

Width: 121cm

Depth: 55cm

The Duo 24 Light supports up to 50kg in weight



Weight - 35kg

To safely mount your




DropTop™, it is

recommended that two



people assist with the

installation

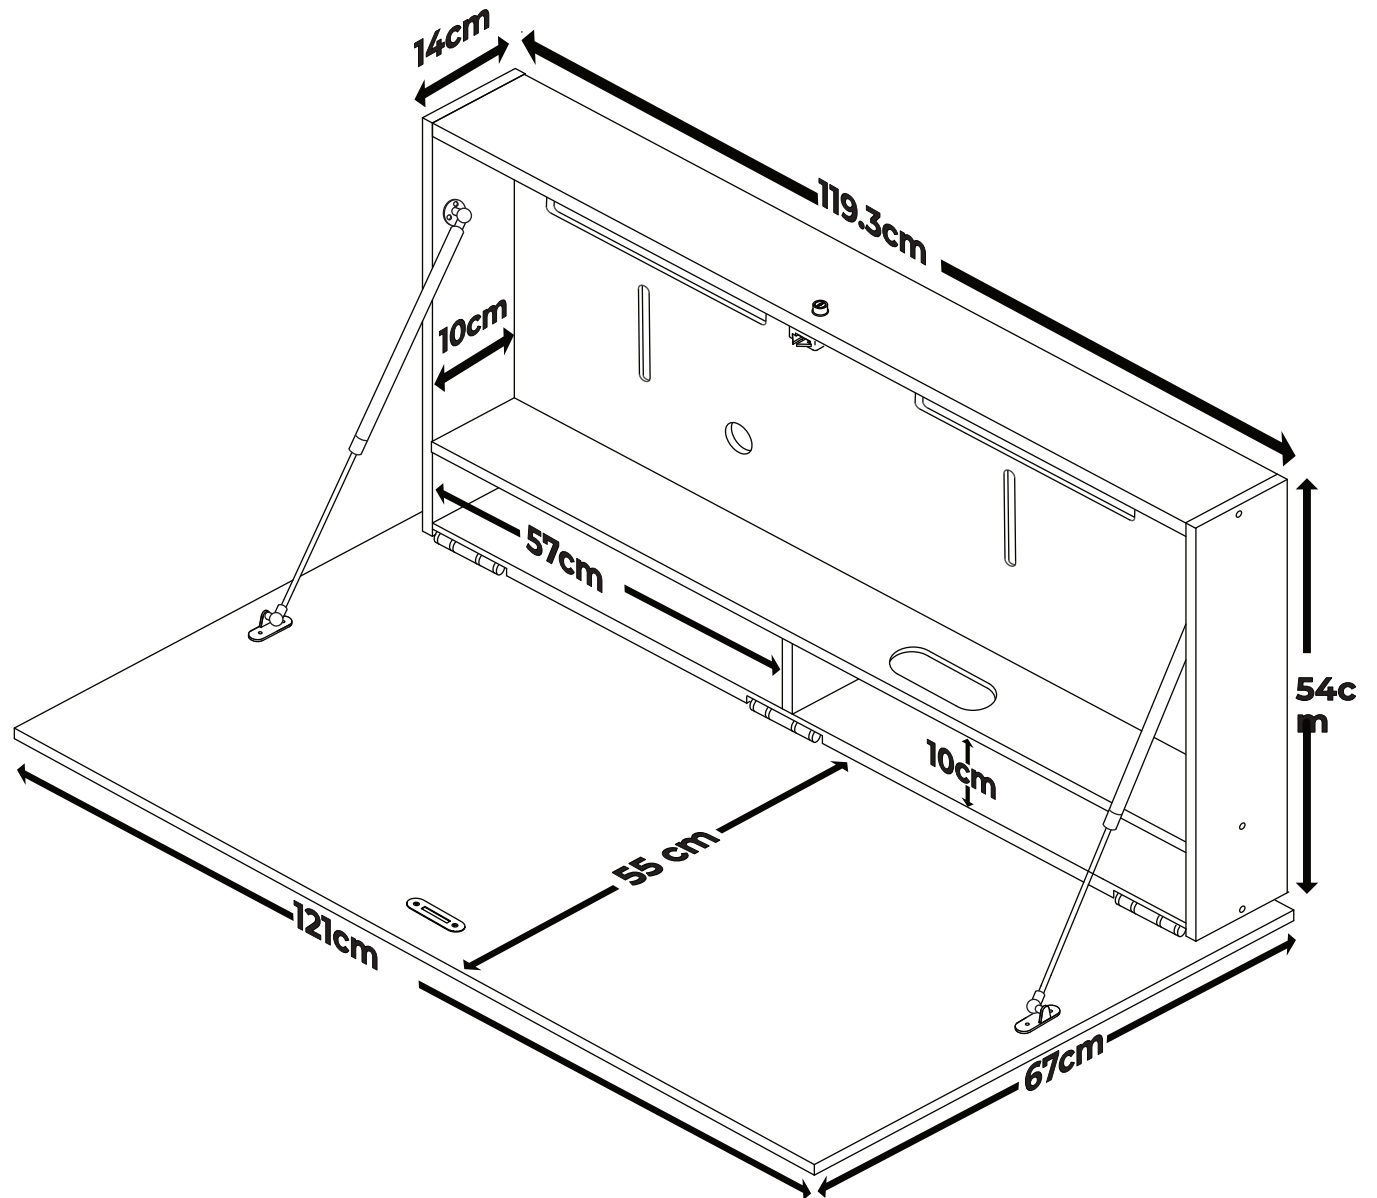

DropTop™ Duo 24 Light Monitor space dimensions


The Duo 24 Light is designed to house dual 24-inch monitors.

Available Monitor Space dimensions:

Height: 38 cm


Width: 111 cm

Depth: *Please see note below**



Note that the monitor space depth varies with your chosen Monitor Mount

Monitor Mount	Depth available
Extendable	5cm
Tilt	6cm
Slim	8cm

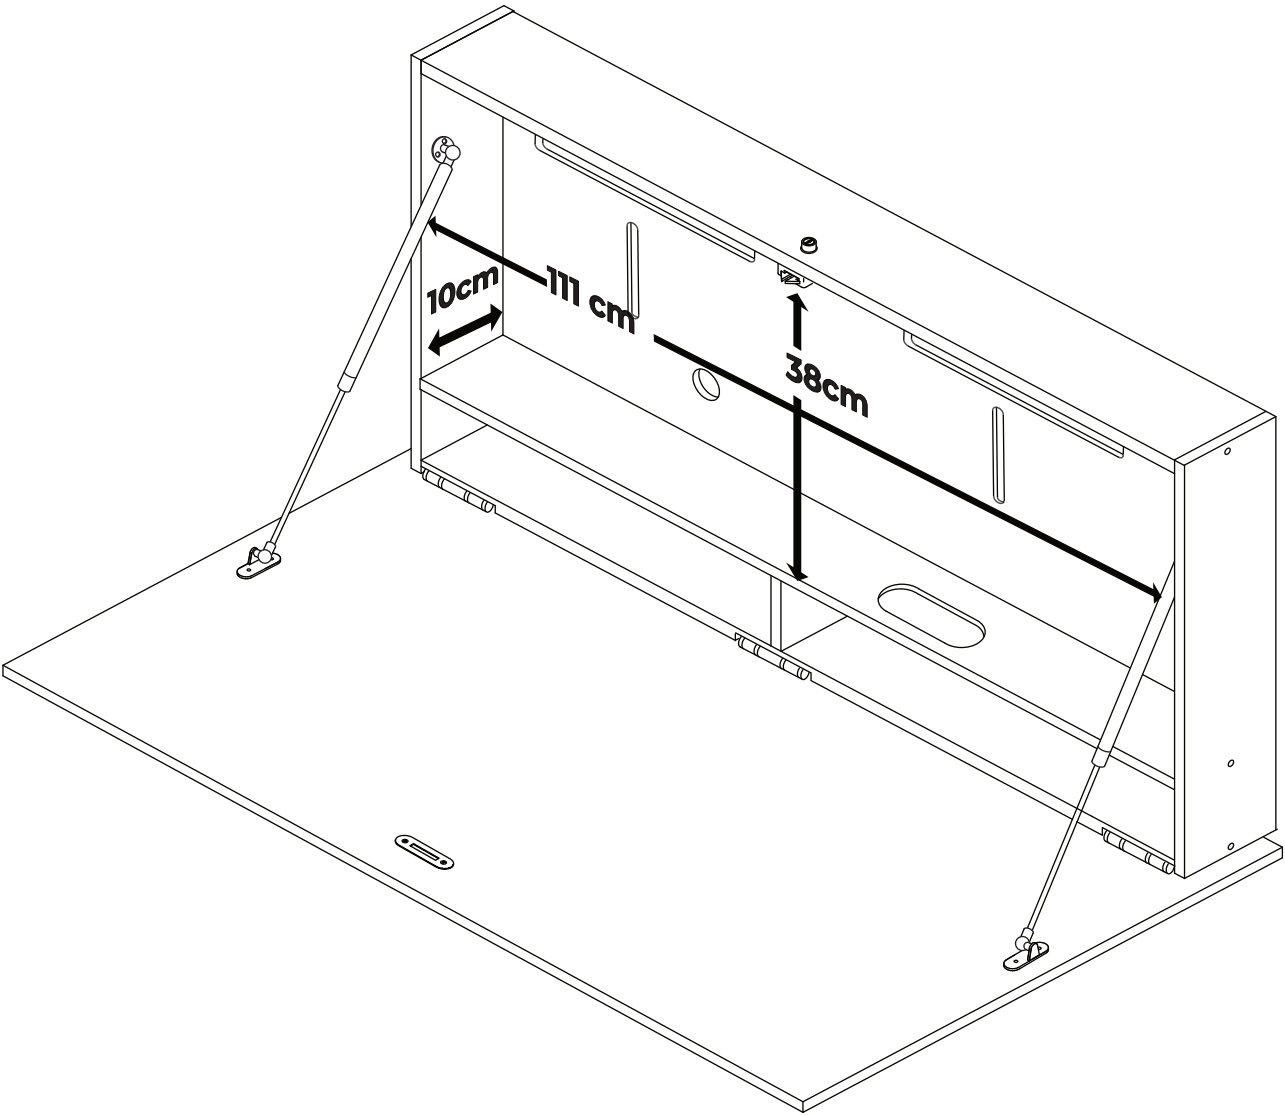



Monitor Mounts.

Your DropTop™ Light will include one of the following monitor brackets, depending on your order configuration.

Extendable Arm Mount

Depth: 5cm


**The recommended
maximum depth
for your monitor is 5cm**

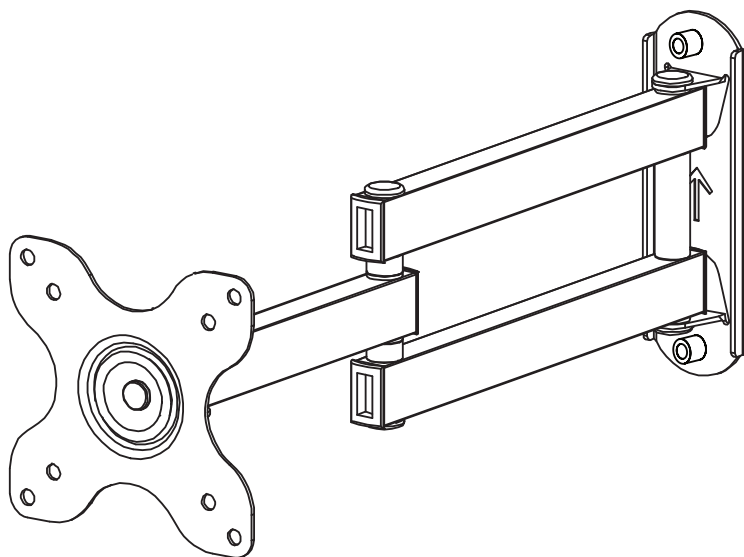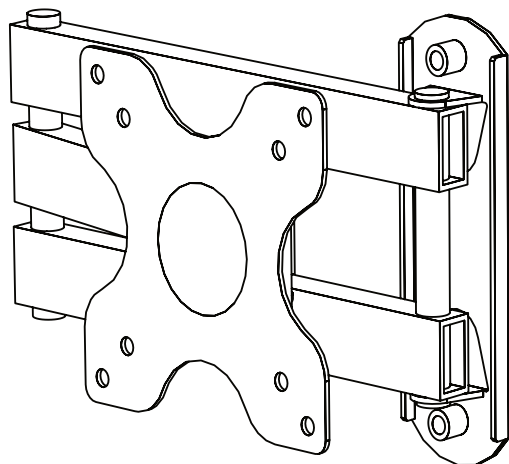

Slim Mount

Depth: 1.3cm


**The recommended
maximum depth
for your monitor is 8cm**

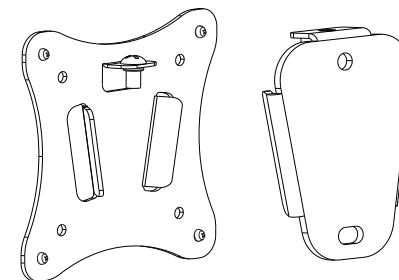

Tilt Mount


Depth: 3.3cm

**The recommended
maximum depth
for your monitor is 6cm**

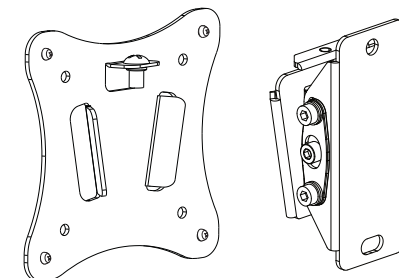


**Ensure your monitor supports VESA
75x75mm or 100x100mm standards and
check the advised depth for each mount.**

DropTop™ Duo 24 Light Wall Plate dimensions.

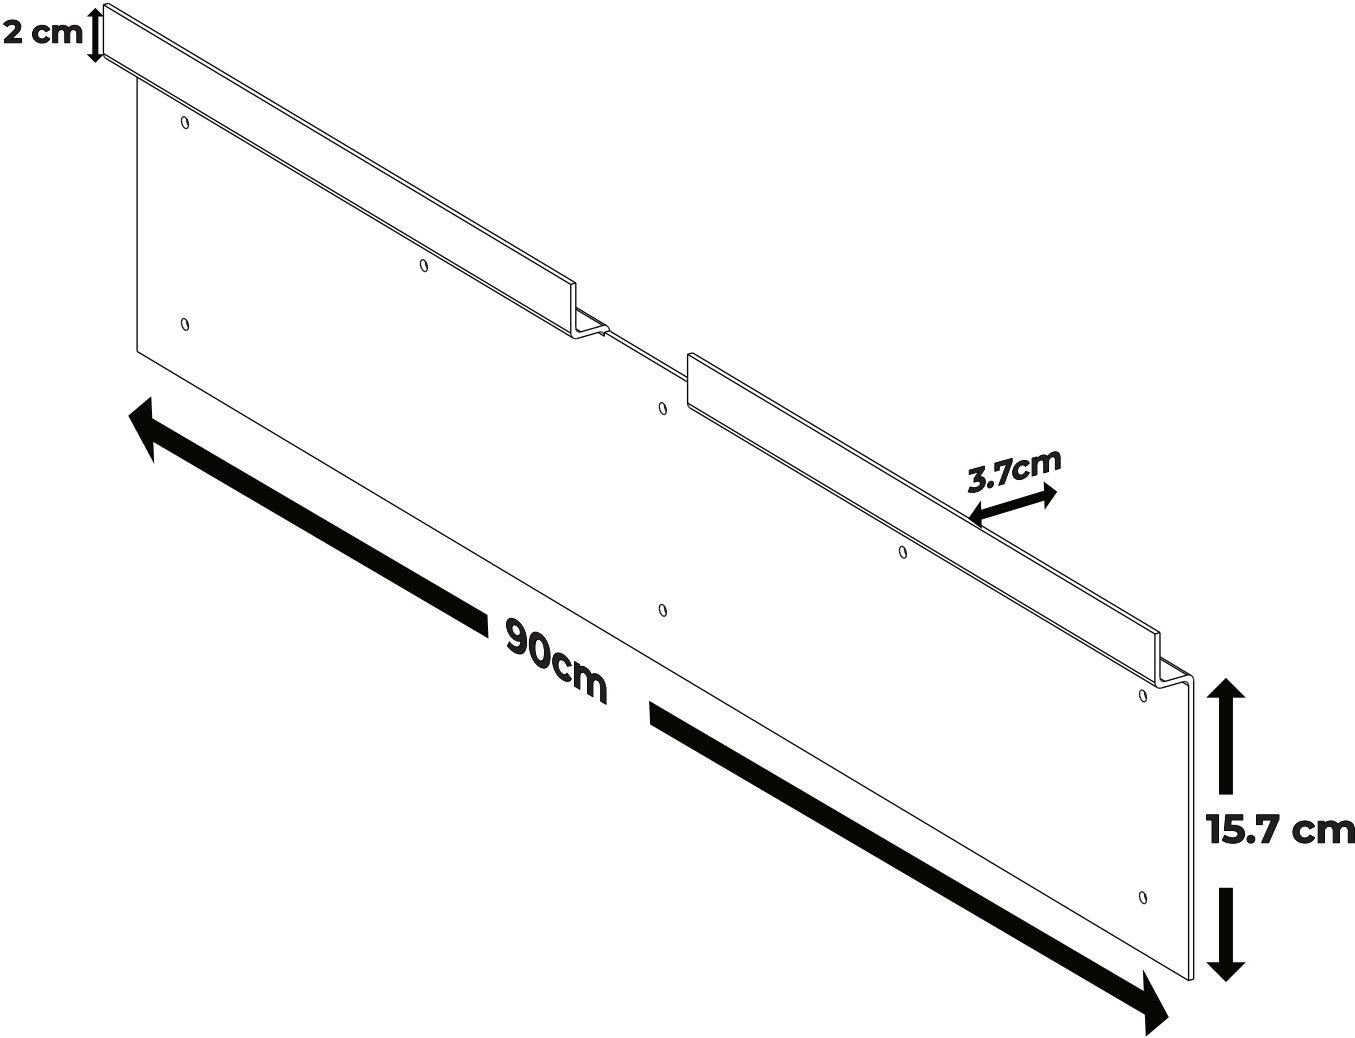

DropTop™ Duo 24 Light Cable Management


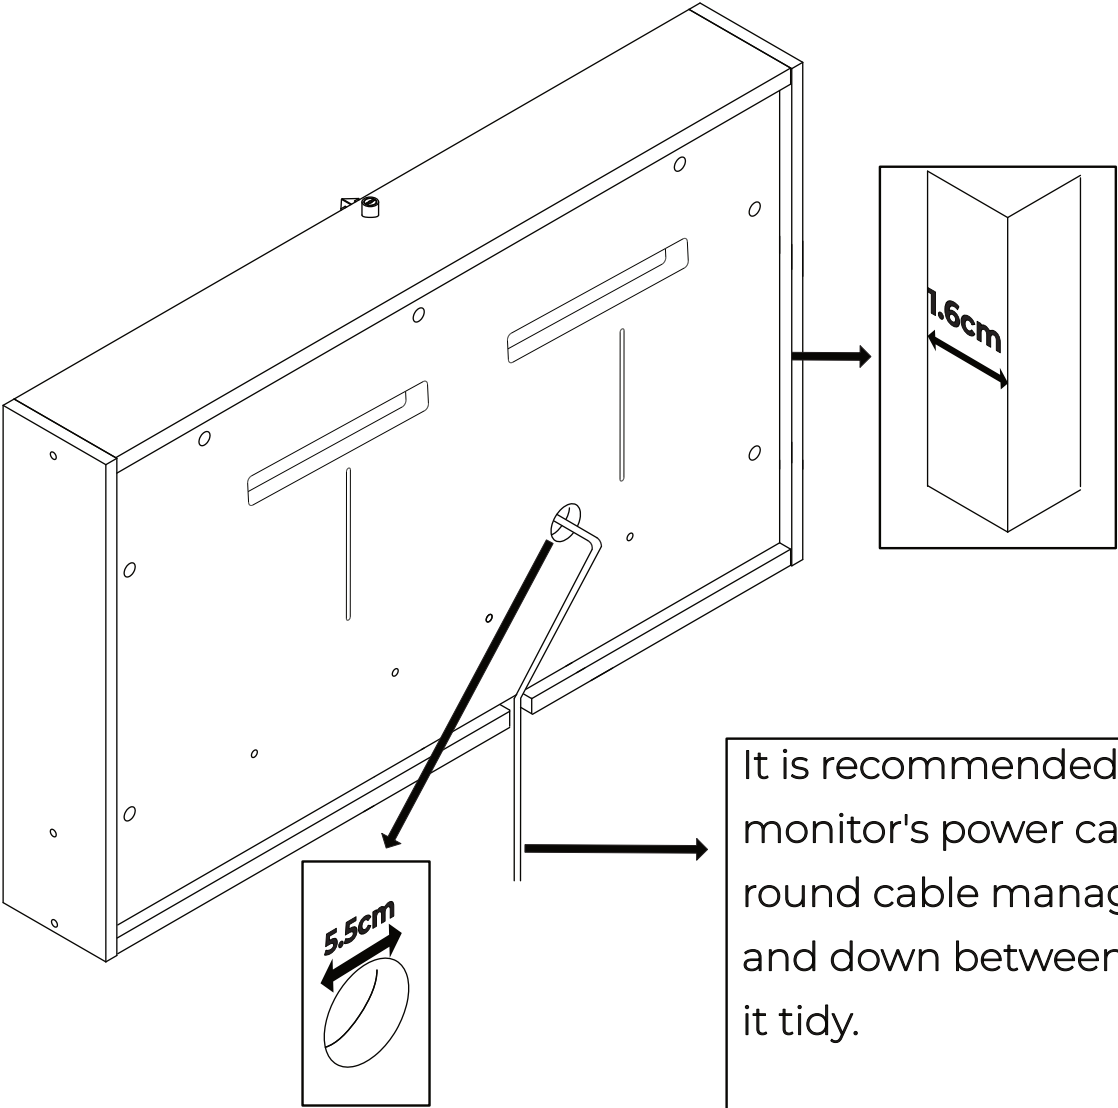


The Duo 24 Light is designed with a back recess depth of 1.6cm. This allows for any cables to be fed tidily behind the DropTop


It is recommended to feed the monitor's power cable through round cable management grommet and down between the gap to keep it tidy.

DropTop™ Duo 24 Light Assembly


1

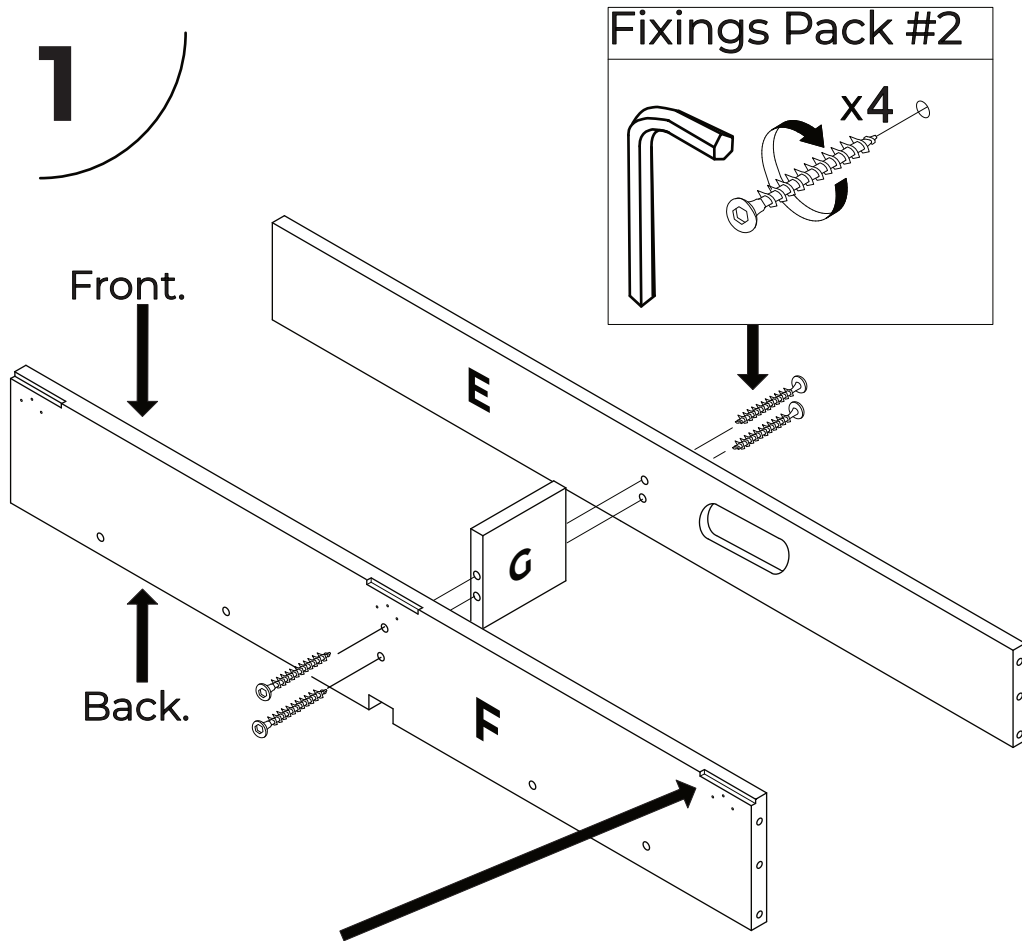


Ensure that part F is correctly oriented before assembly, as shown.




2

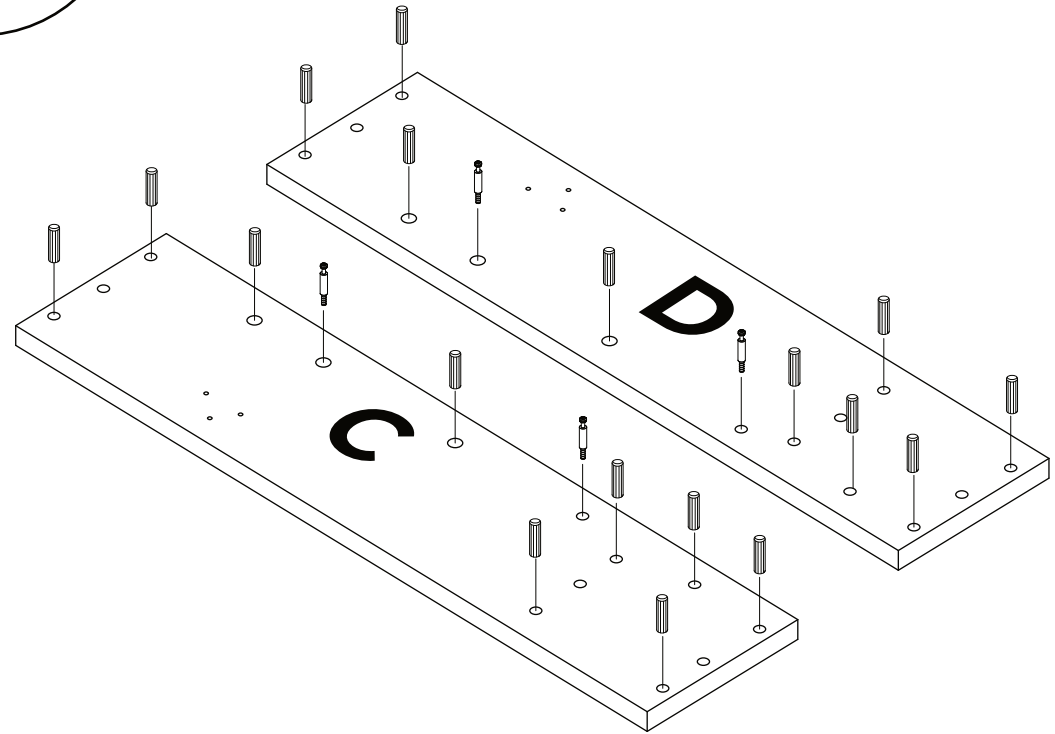


Fixings Pack #1




Fixings Pack #3




3

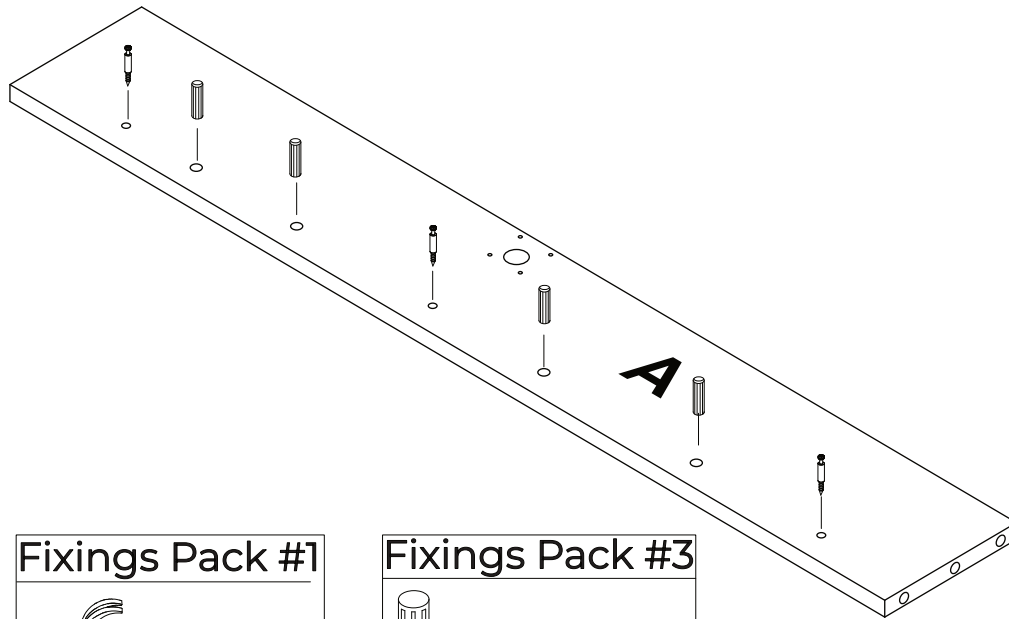




Fixings Pack #1



Fixings Pack #3




4

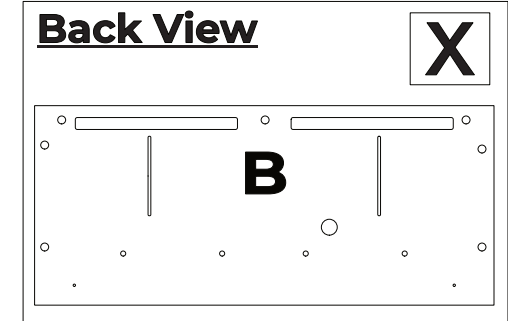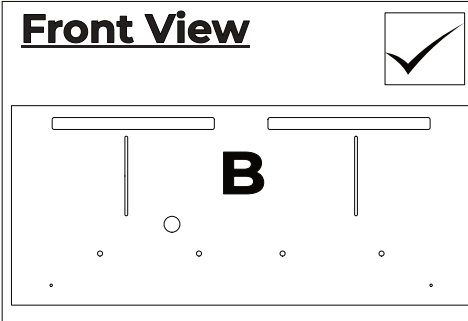
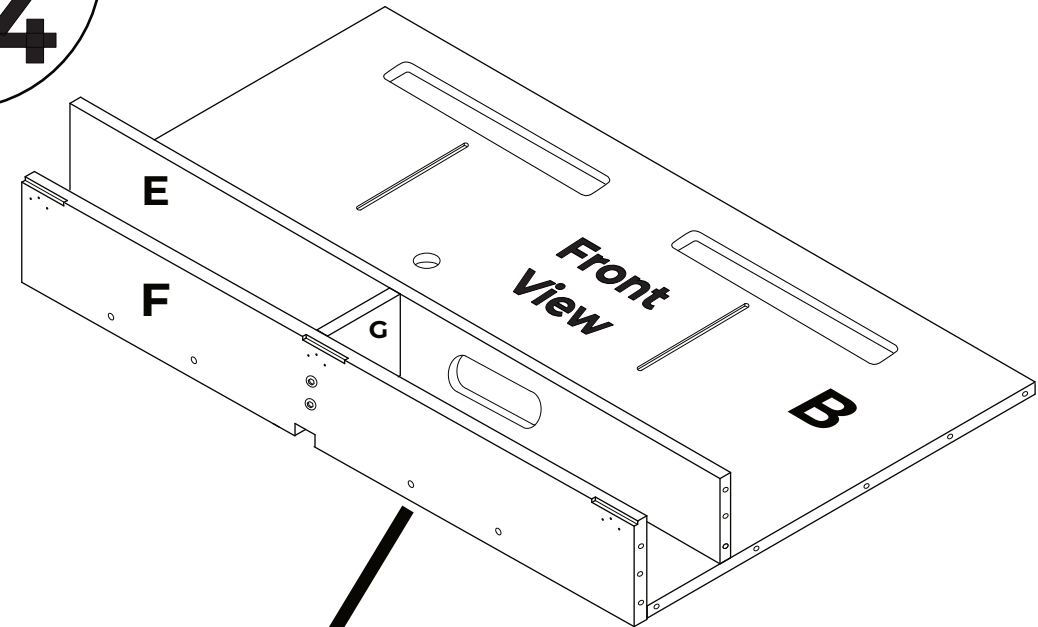


At this step, make sure to position Part B at the front view instead of the back, as shown above.




5

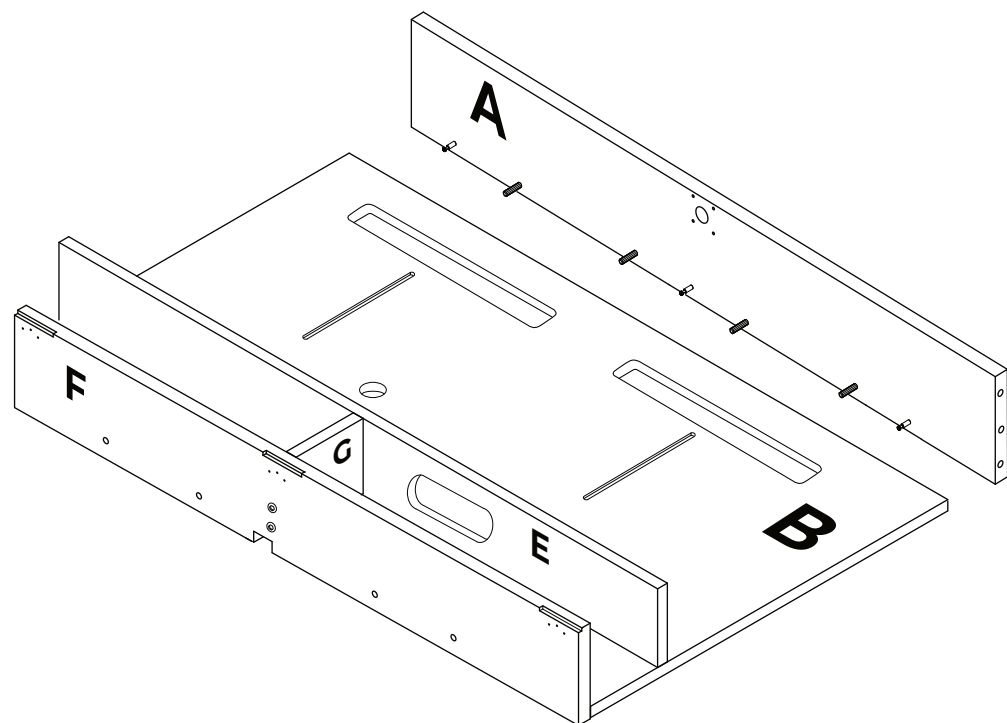

6

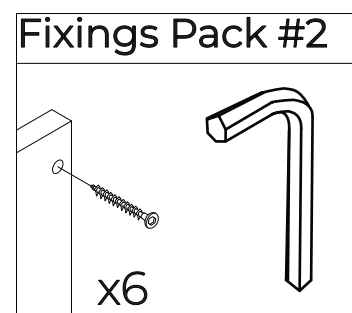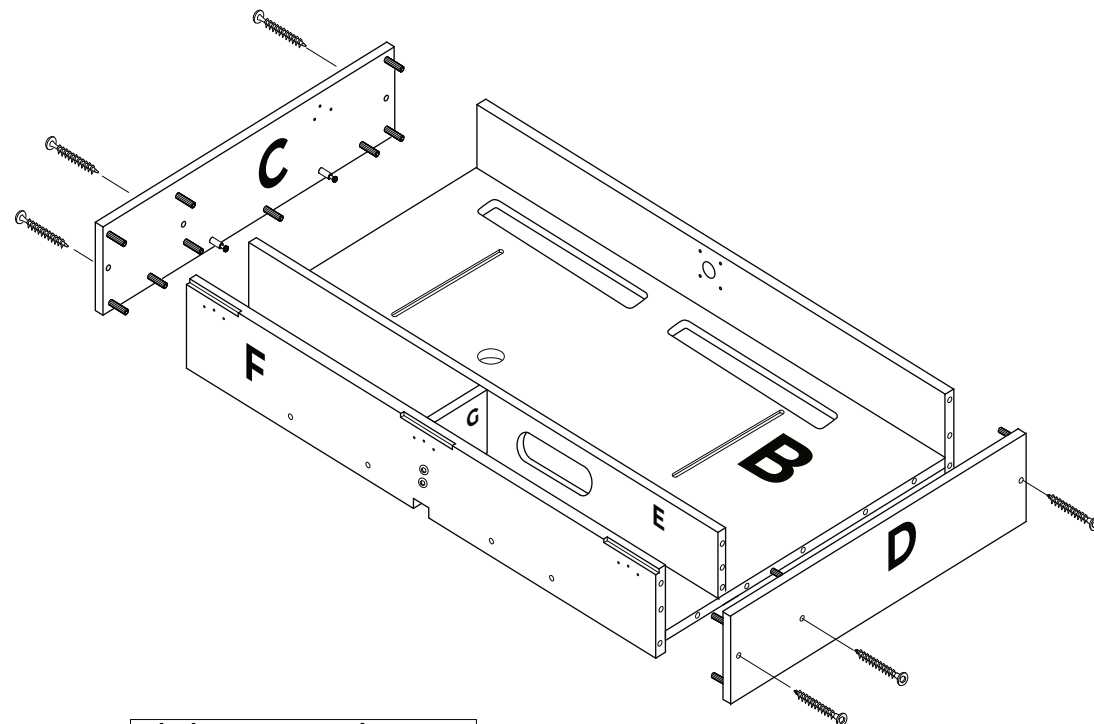


7

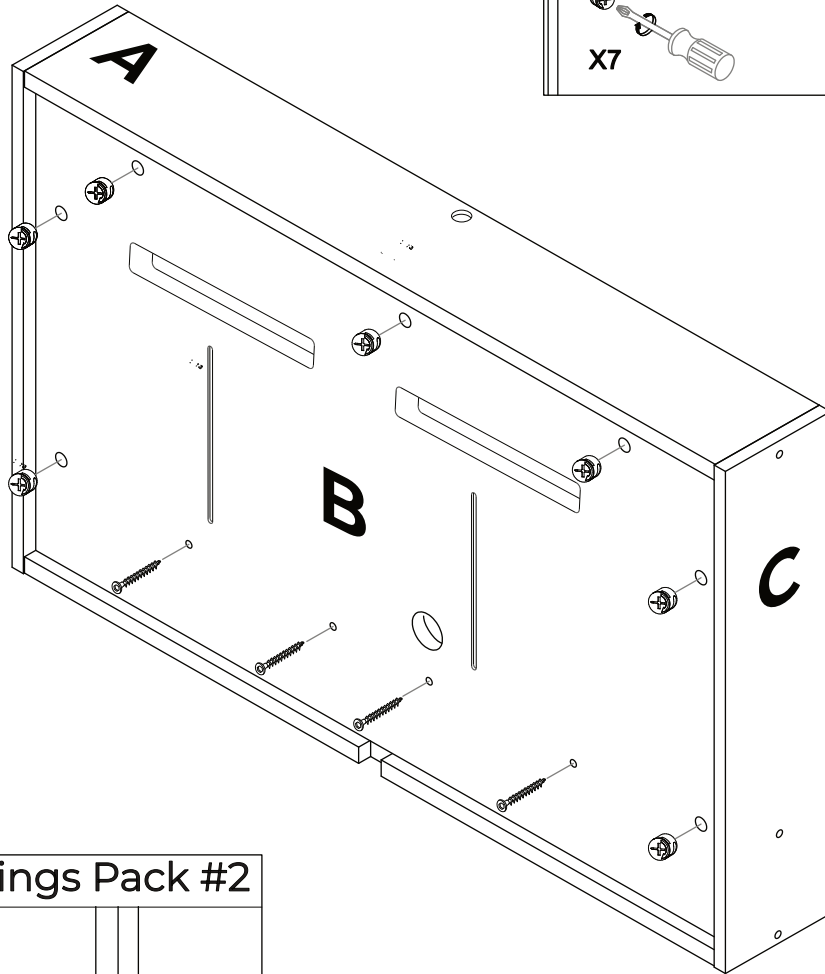


Back View


8



Lay part H down flat, then place the assembled component from Step 7 on top, aligning it with the hinge recesses.


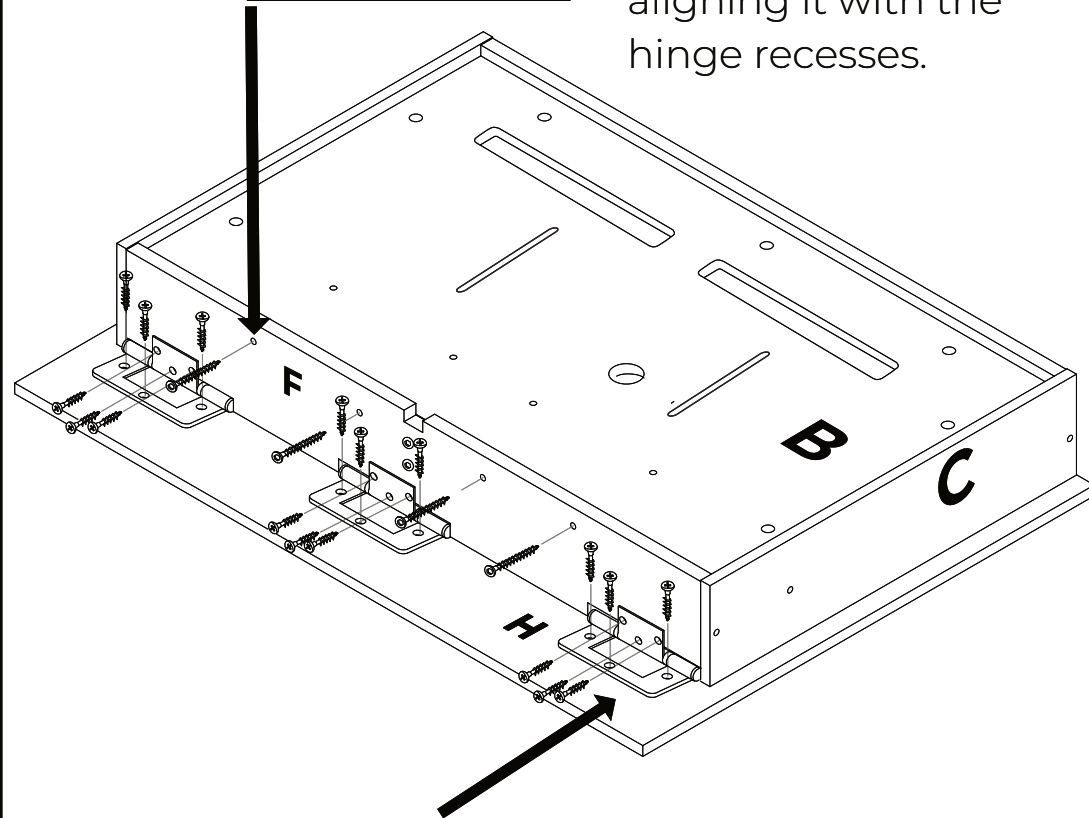


Fixings Pack #5-3

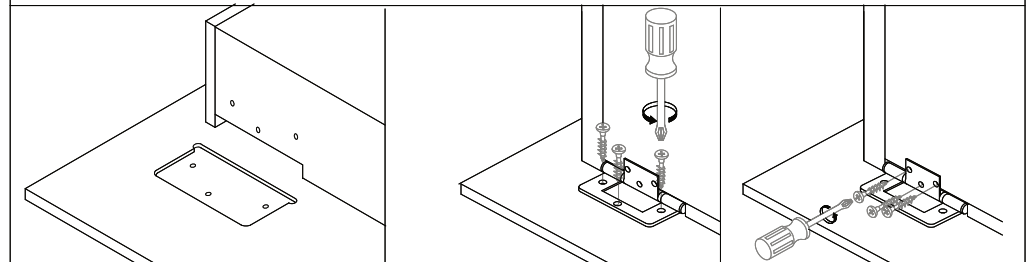

9


Fixings Pack #7

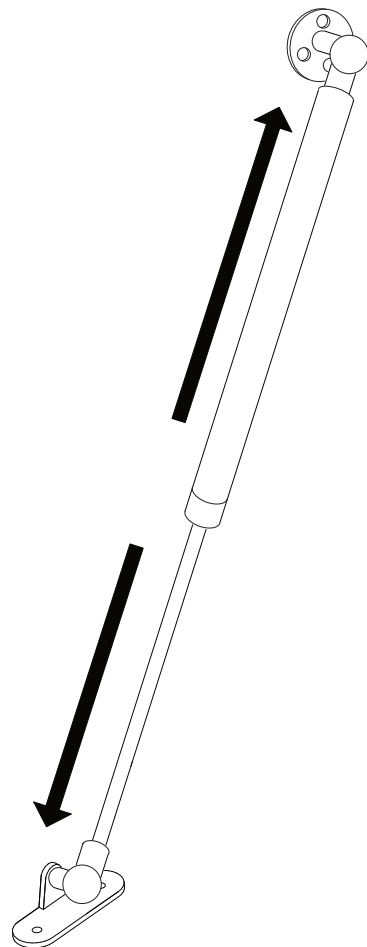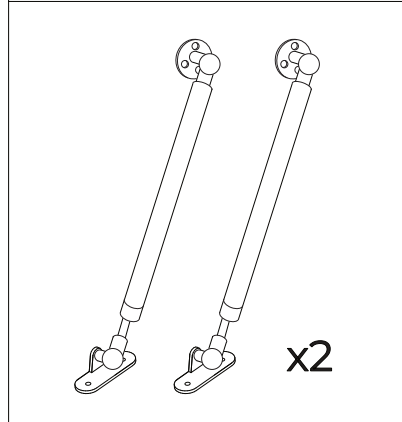


Fully extend the soft opening stays by pulling on each end.

10


Fixings Pack #7




Fixings Pack #7





Fixings Pack #6

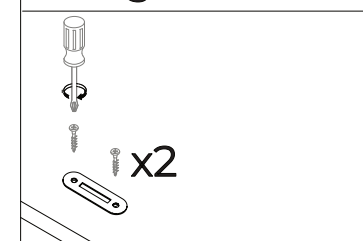

Spheres must point inwards




Fixings Pack #7

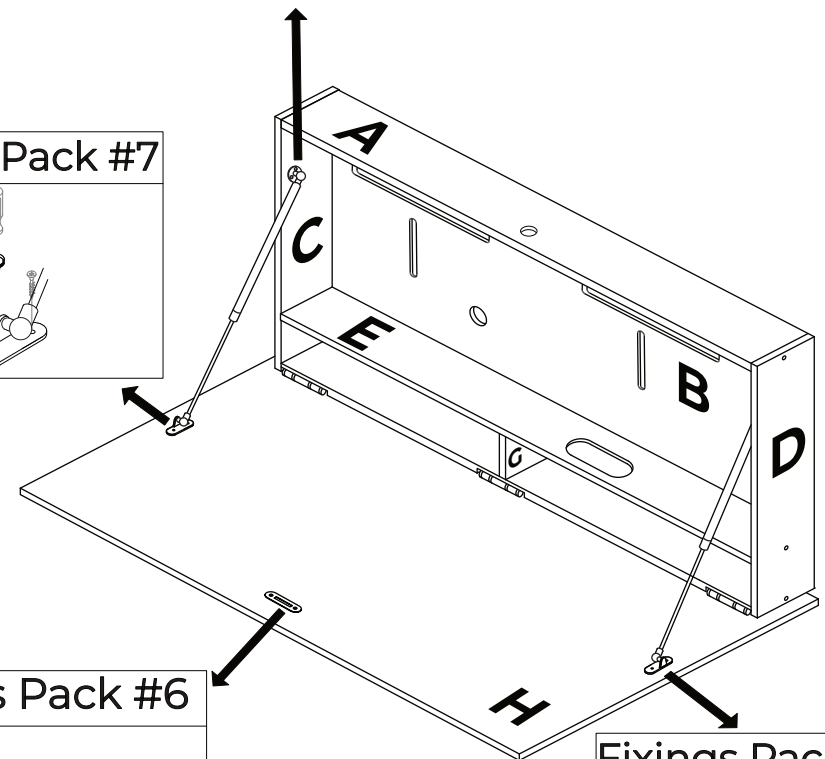


11


Fixings Pack #4




x1

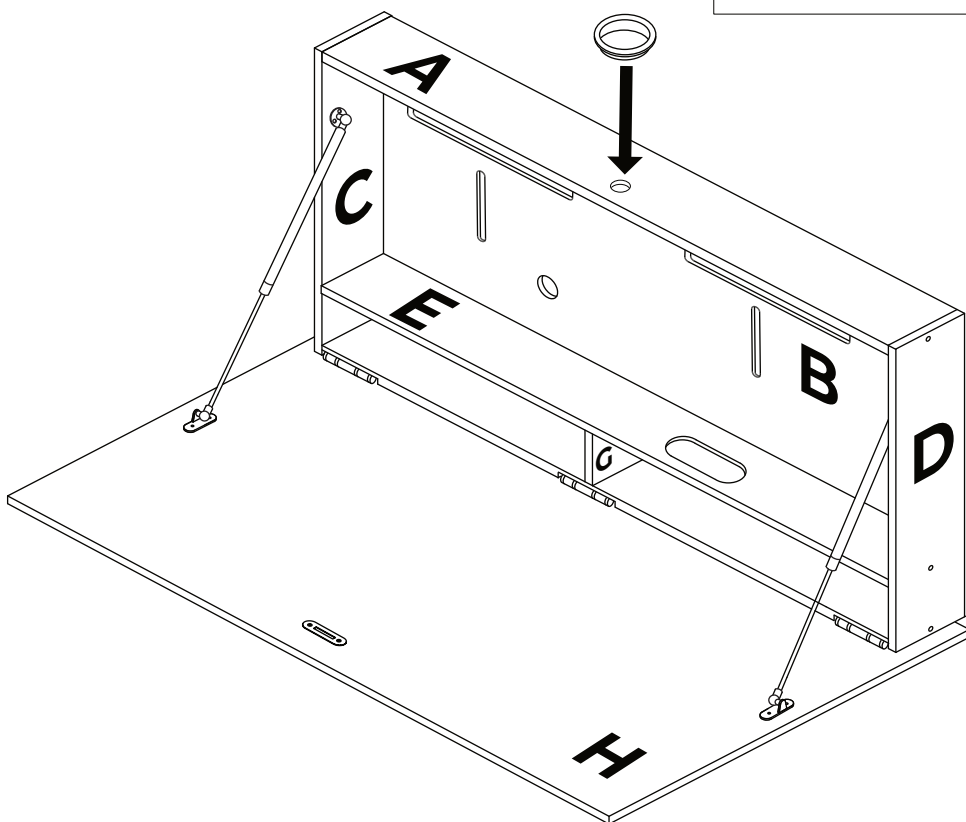

12

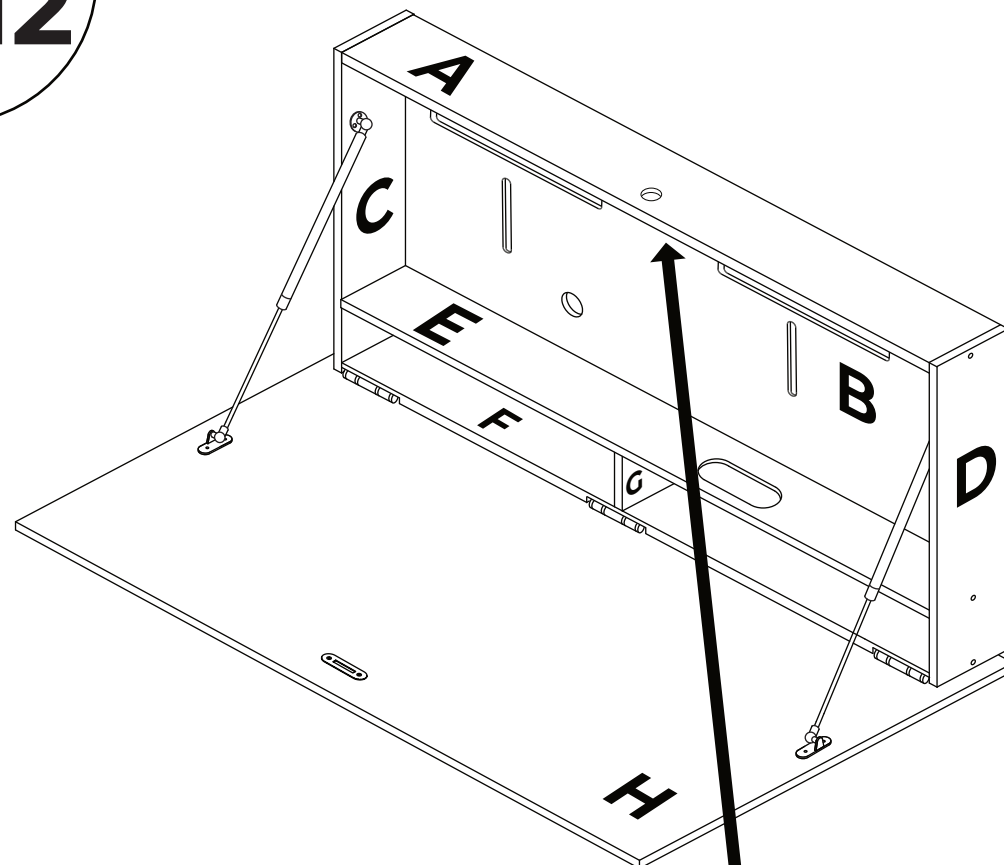


Fixings Pack #4



x4


13

Oval Cable management grommet.




1. Place the two slender metal discs into the black oval ring, aligning them correctly.

2. Slot the assembled cable management unit into the oval recess

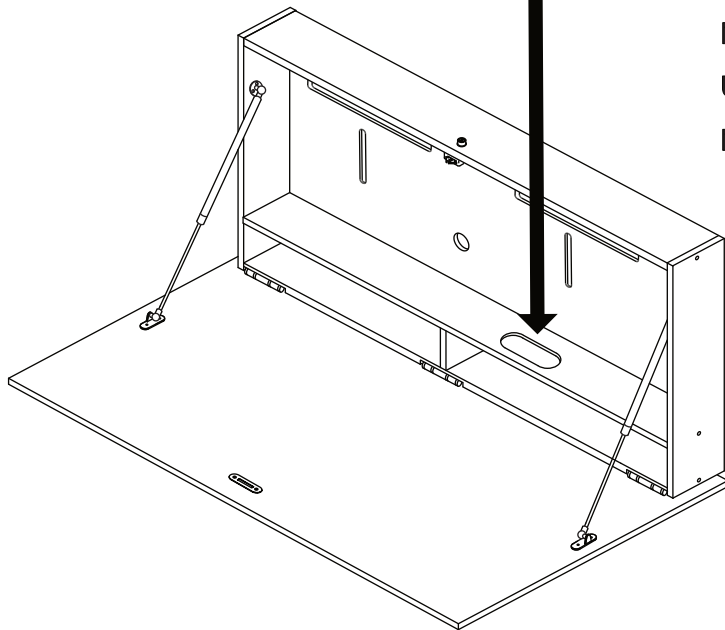



14

Round Cable management grommet.

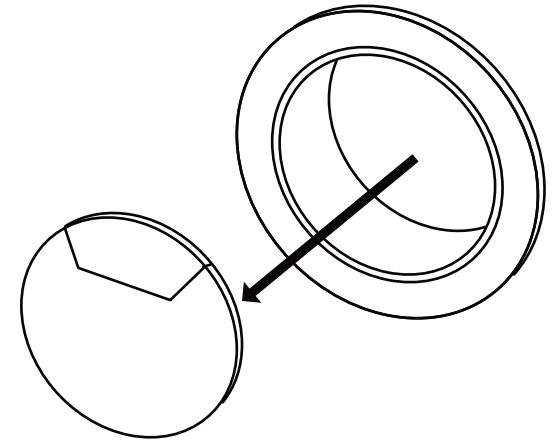


1. Push out the central section of the circular cable grommet. You'll use it later.

2. Fit the outer ring of the cable grommet into part B's circular recess, aligning it carefully

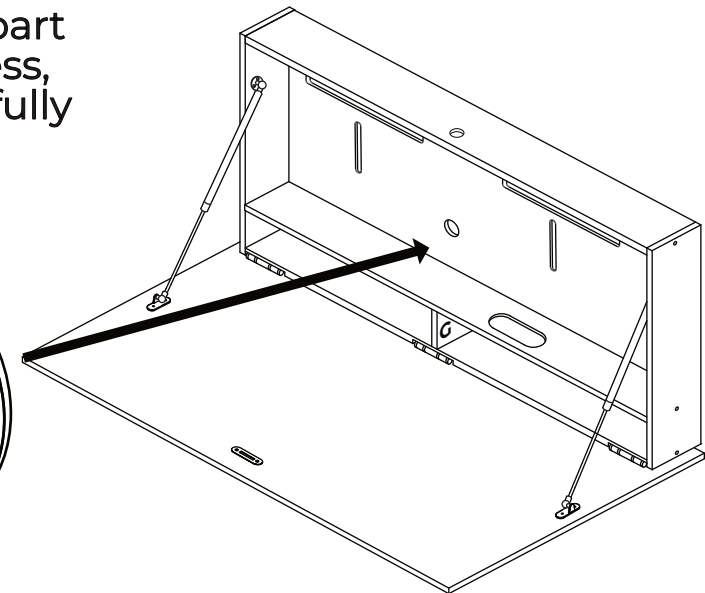

15

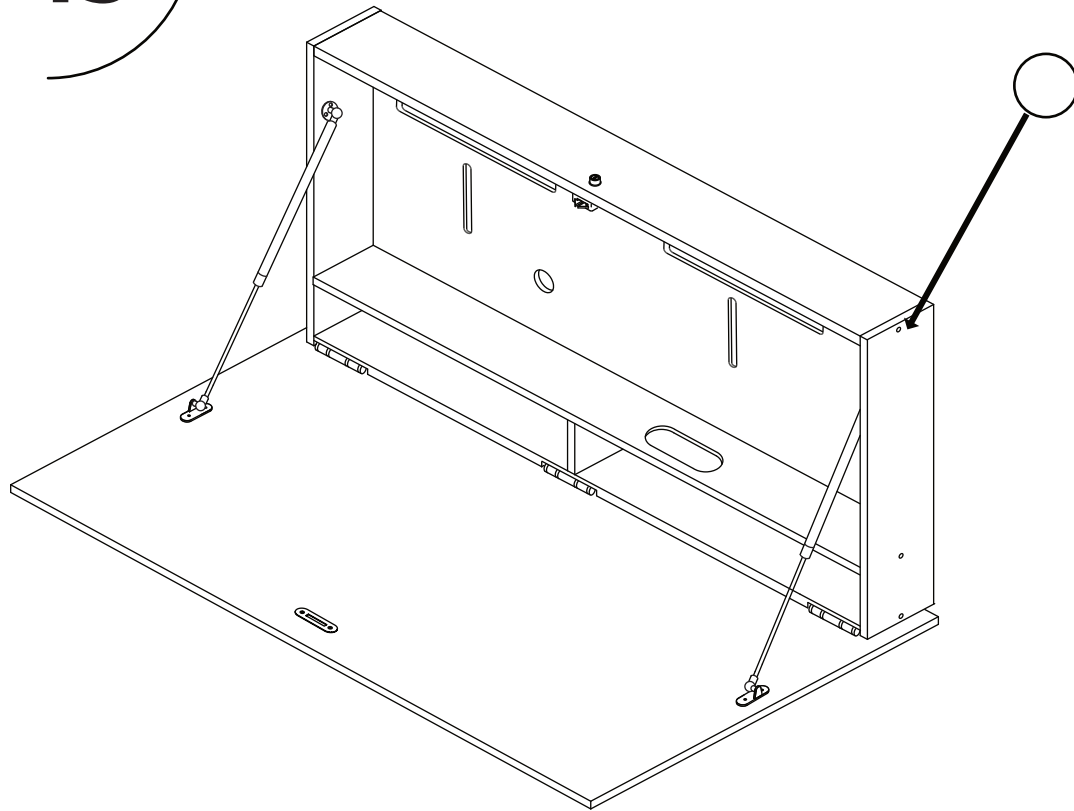







Matching colour cover cap stickers have been provided with your DropTop™

Place the provided colour-matched cover cap stickers over any exposed screws for a clean finish.


To install your monitor on a Slim or Tilt mount.

1

Your DropTop™ comes with either a Slim Monitor Mount or a Tilt Monitor Mount, depending on your chosen configuration.

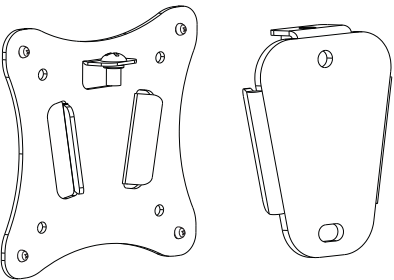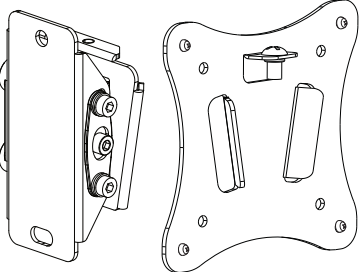Slim Monitor Mount			
			
Tilt Monitor Mount			
			



2

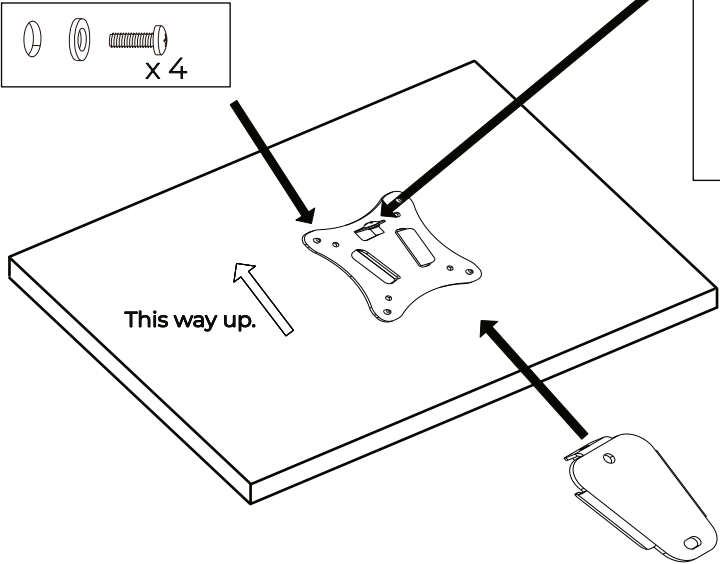

Fix the VESA plate to the monitor with the supplied screws.

3



Feed the power cable through the cable management cutout.

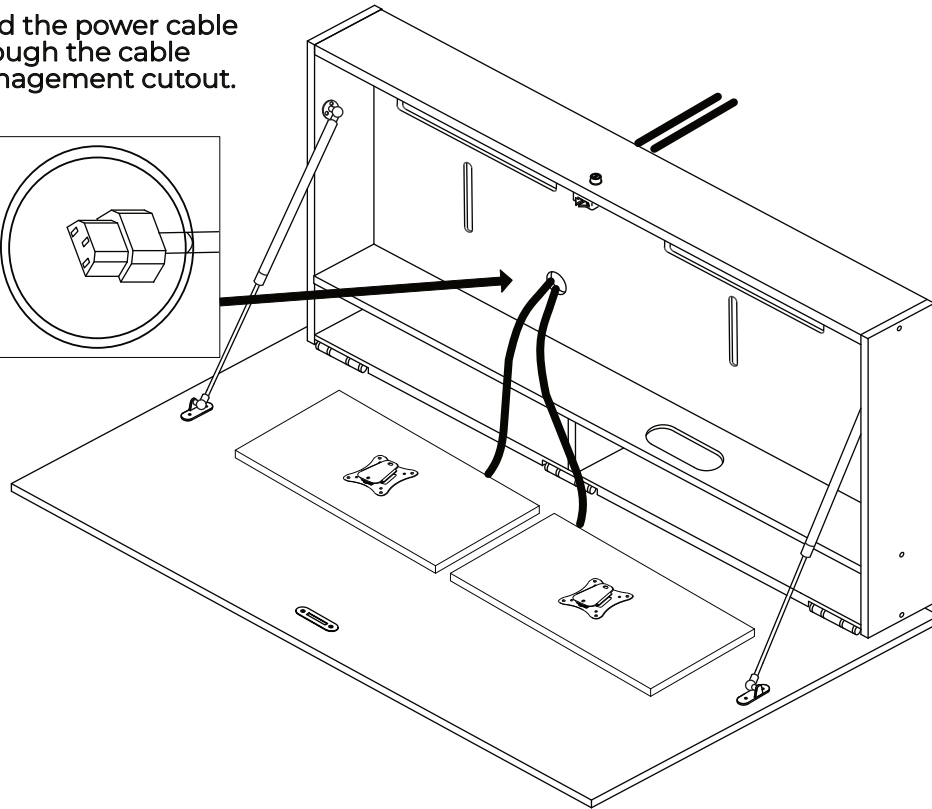

Place the monitors face down on the worktop.
Feed the power cable through the round cable grommet at the back of panel B and plug it into your monitor.


4

Attach your selected cable to the monitor and pass it through the oval-shaped cable grommet on panel E.

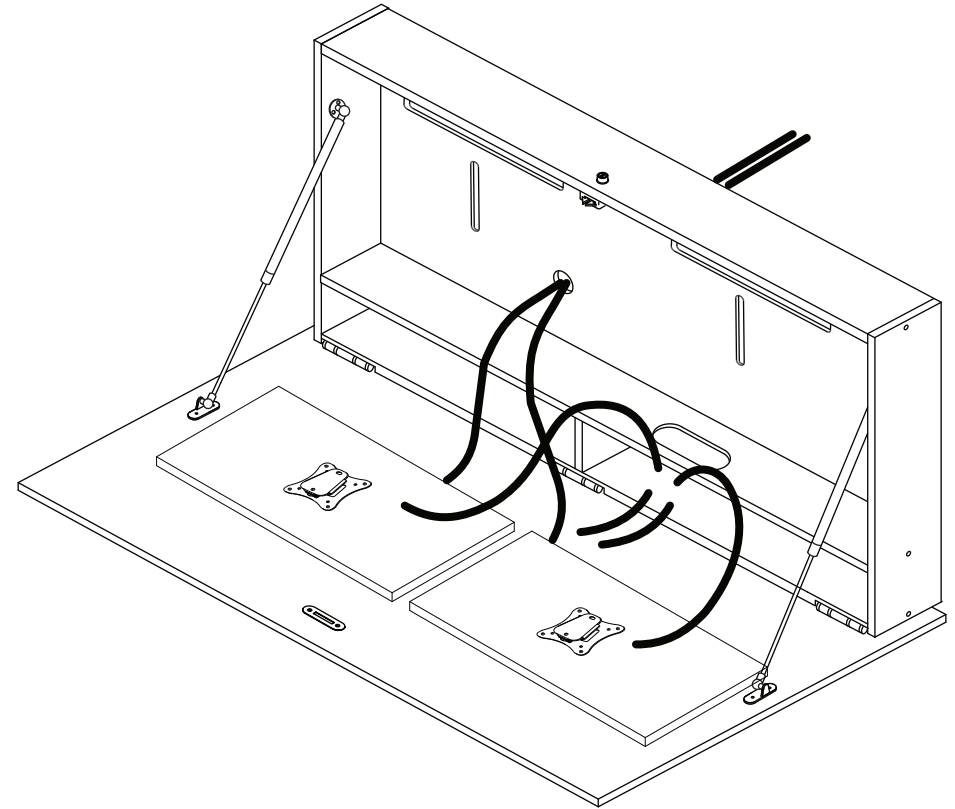


After cabling, reattach the central section to the round cable grommet.

5

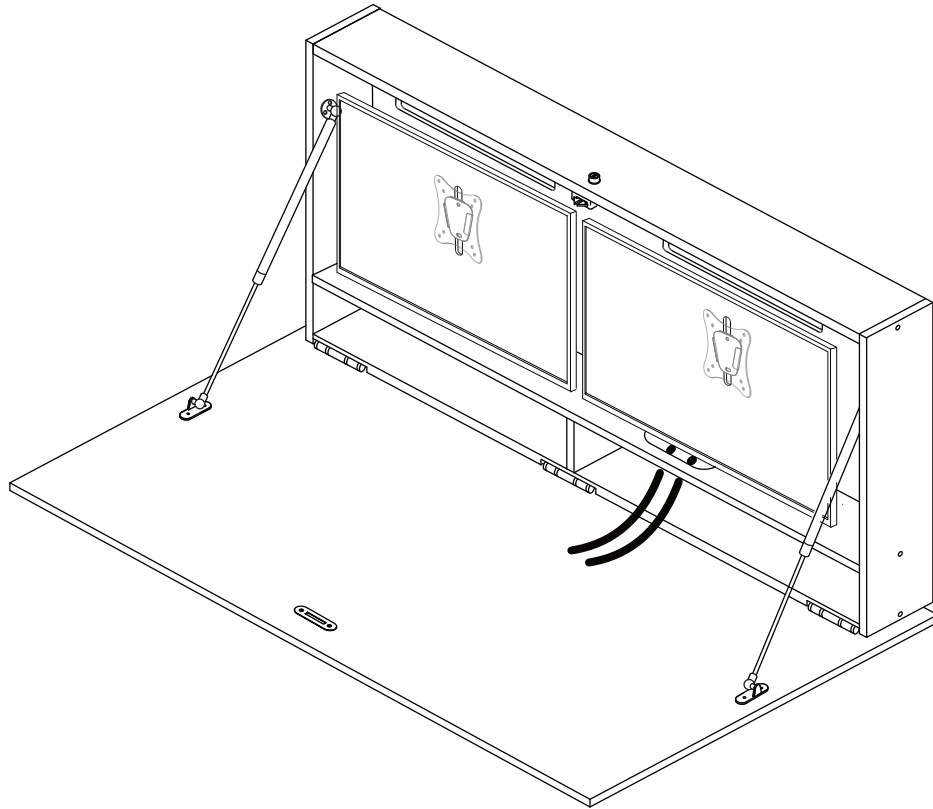


Place your monitor into the DropTop™ monitor space, ensuring cables are properly routed through.

6

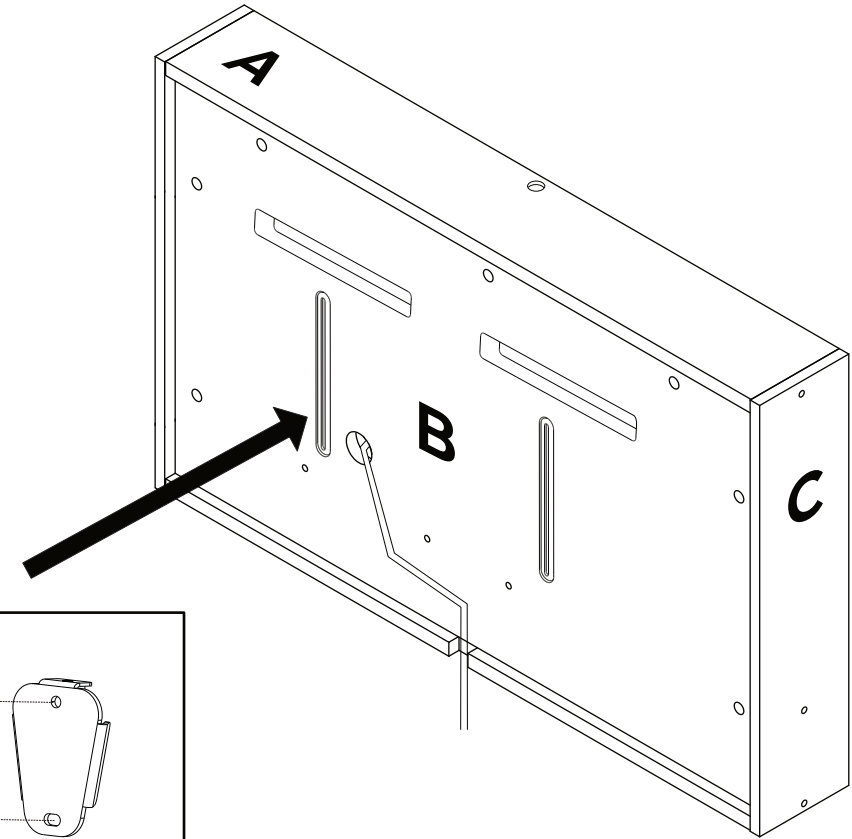


Back View

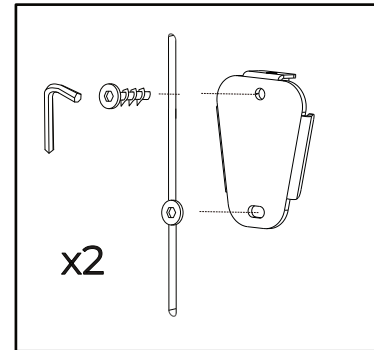


Secure the monitor from the front. At the back, insert and lightly screw the bolts to keep it in position. Fine-tune the height as needed, then fully tighten the bolts to firmly secure the monitor.

To install your monitor on an Extendable Arm Mount


1




a -Wall Plate & Articulating Arms(1)




b-VESA Plate(1)



c-Wrench(1)



d-Bolt(2)




f- M4 x12Bolt



l-Cable Tie(3)




m-Allen Key(1)





2 x M6 Bolt

2

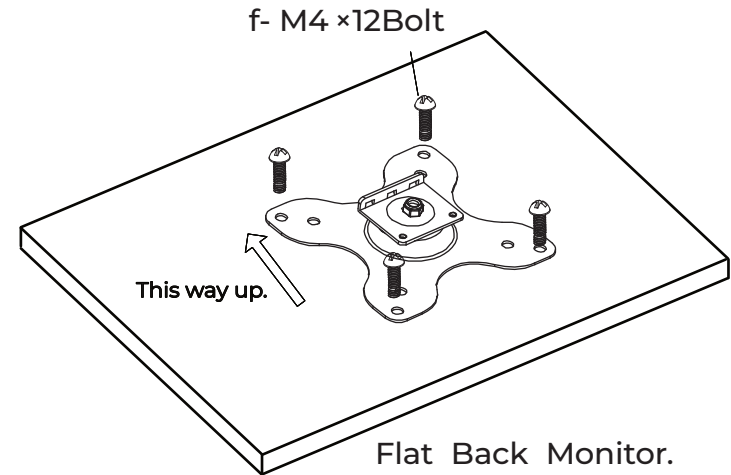


Attach the VESA Plat-b to your monitors using the provided screws.

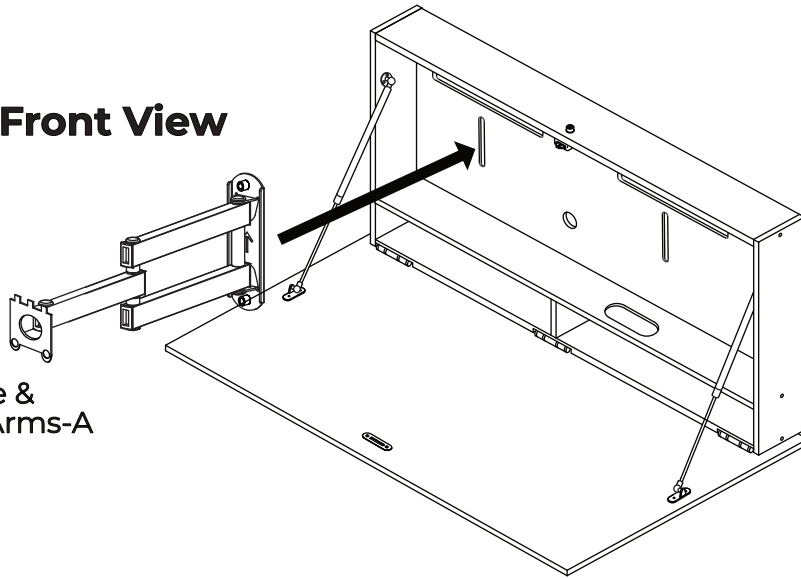3**Front View**Wall Plate &
Articulating Arms-A**Back View**2 x M6
Bolt


Attach the Wall Plate & Articulating Arms-A to the VESA slot on the back of the DropTop, using the 2 x M6 bolts provided.

4


Fully extend the articulating arms out.

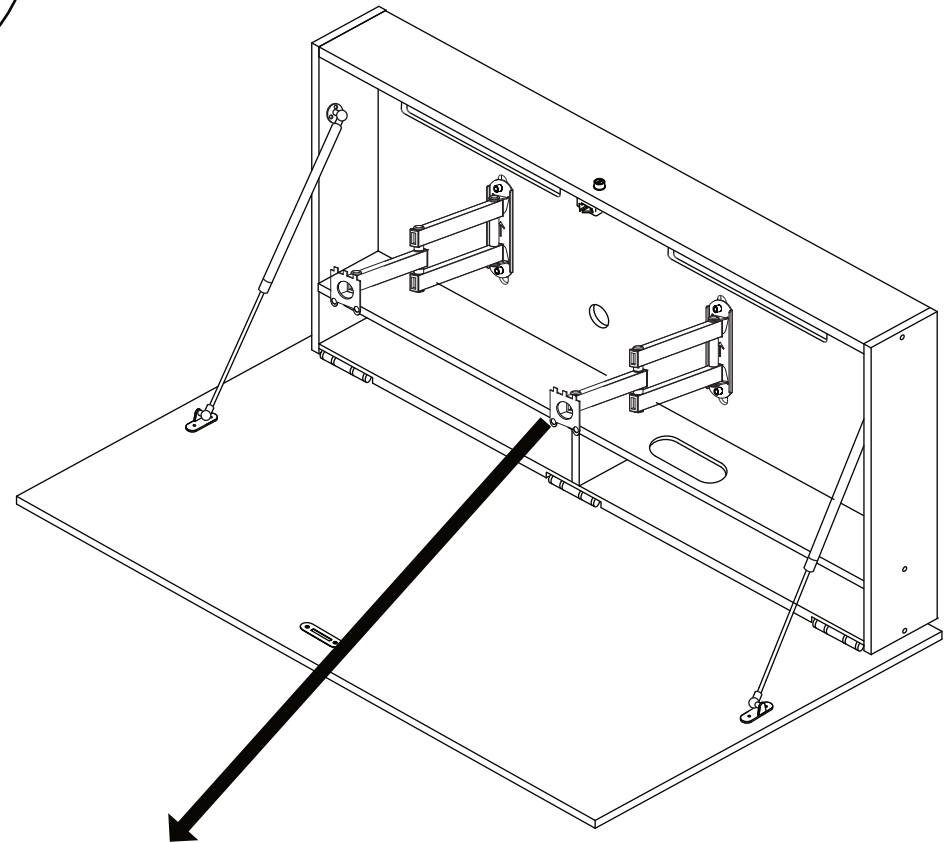

Correct





Incorrect



At this step, ensure the extendable mount is positioned the correct way up, as shown in the illustration

5



Feed the power cable through the cable management cutout.

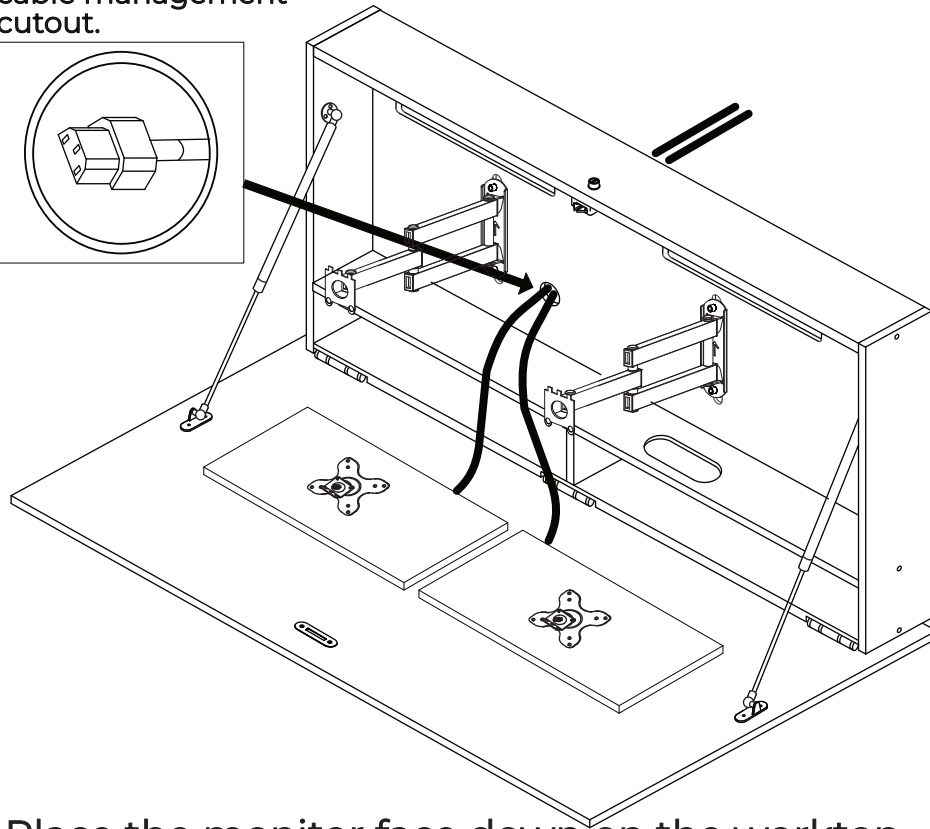

Place the monitor face down on the worktop. Feed the power cable through the round cable grommet at the back of panel B and plug it into your monitor.




6

Attach your selected cable to the monitor and pass it through the oval-shaped cable grommet on panel E.

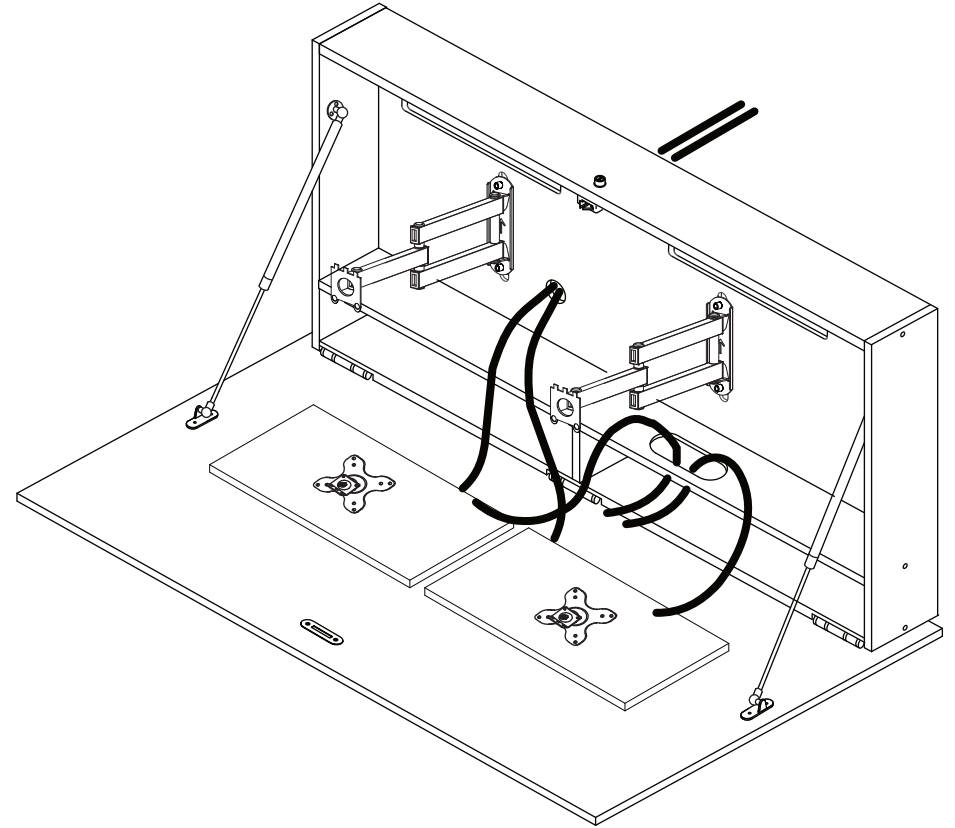


After cabling, reattach the central section to the round cable grommet.

7

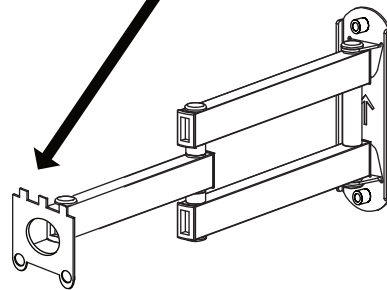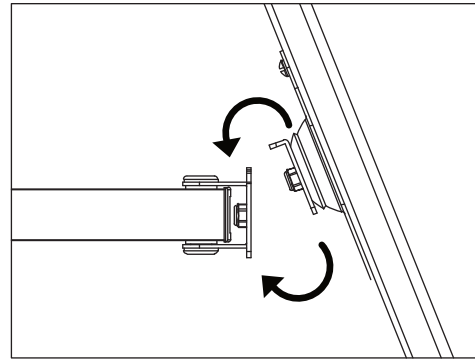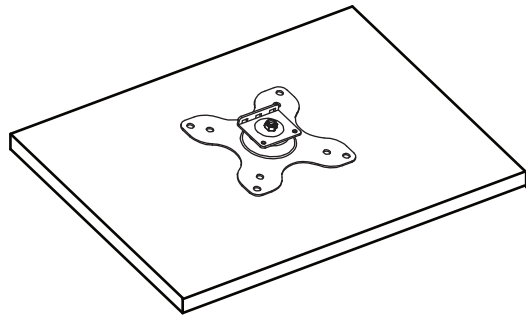


Hook the VESA Plate-b to the Socket on the fully extended arms.

8

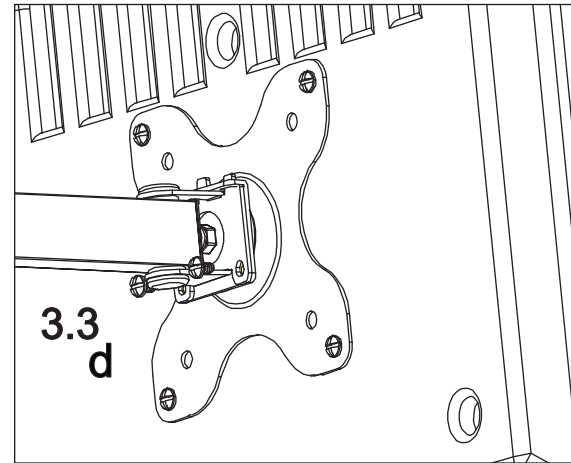


2 x M4 Bolt -
d

Secure the VESA Plate-b to the articulating arm using the 2x M4 Bolt-d provided.

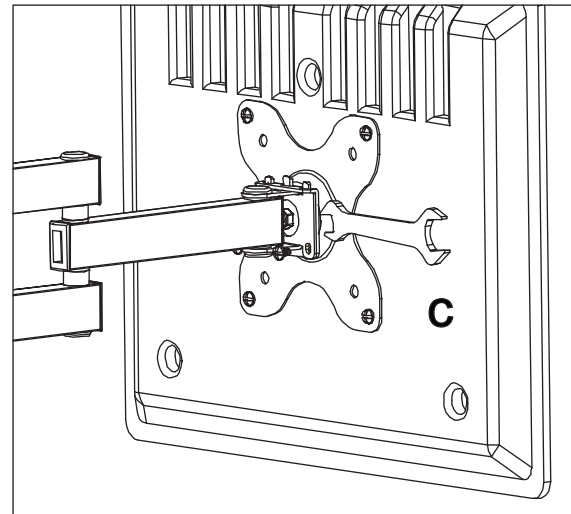


Use the wrench provided to adjust the tilting angle of the VESA Plate-b.

9

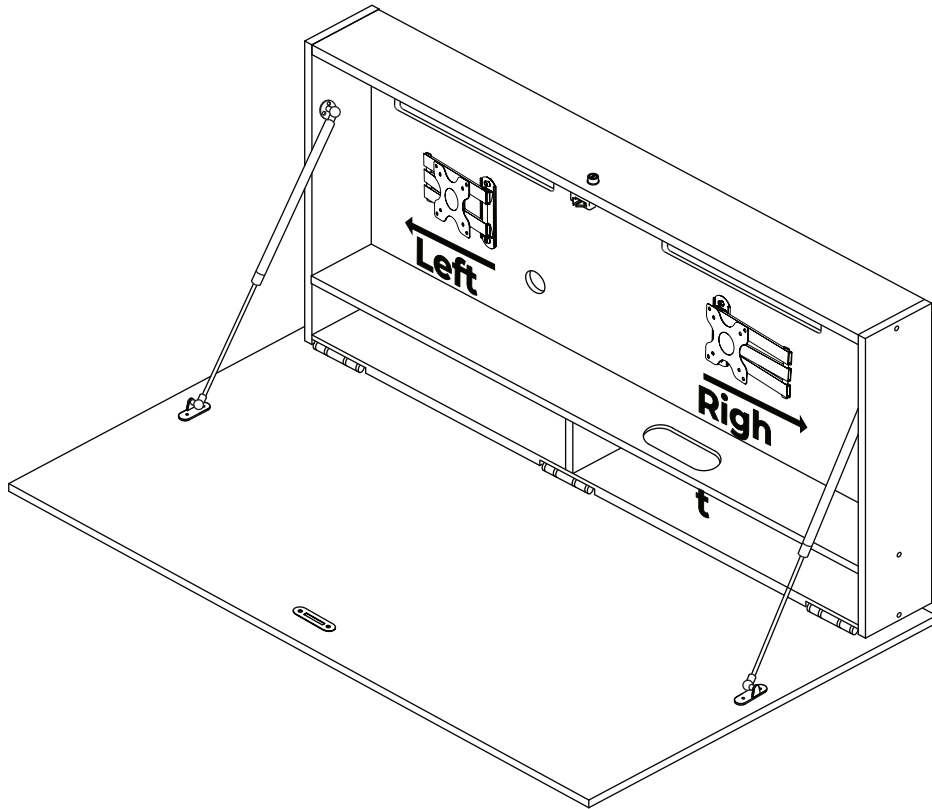


The mount brackets should be positioned as indicated in the diagram to ensure proper and mounting of the monitors.

10

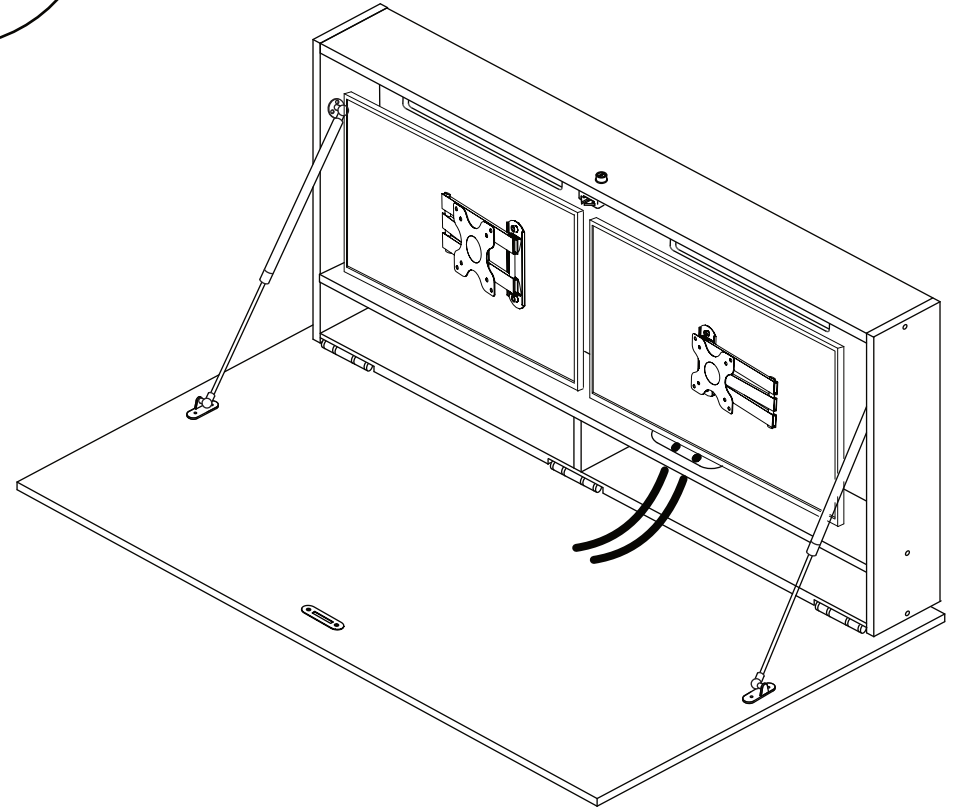


Place your monitor into the DropTop™ monitor space, ensuring cables are properly routed through.

11

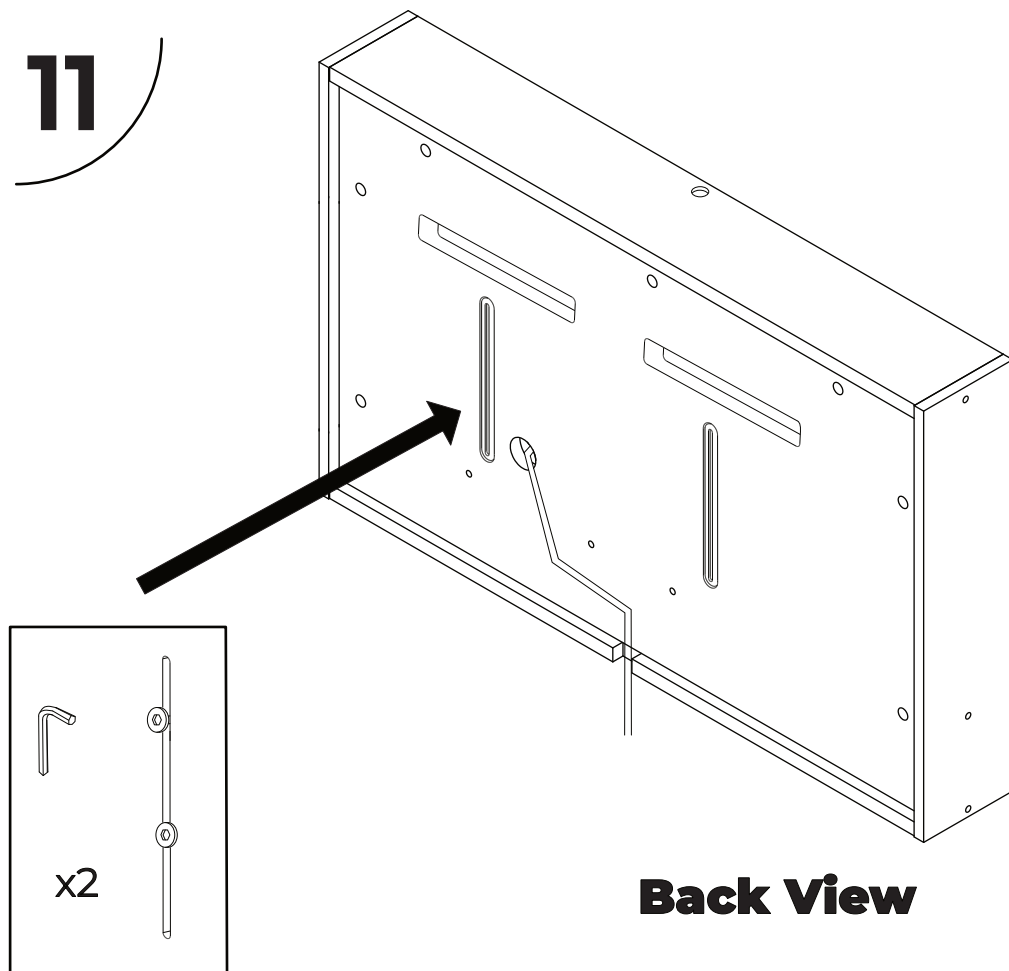


While securing the monitor from the front, slightly loosen the screws at the back and adjust the height as needed. Once the desired height is achieved, fully tighten the bolts to firmly secure the monitor.

Mounting the Wall plate.

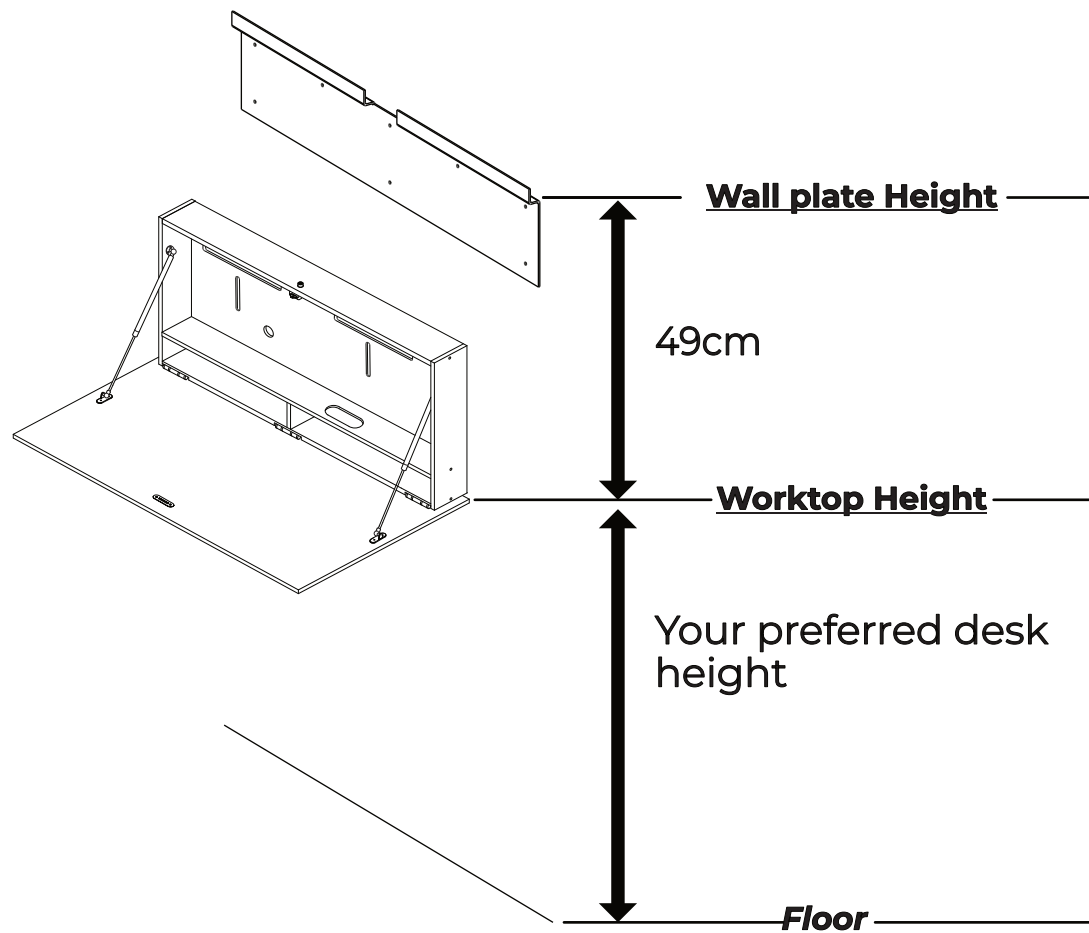


Your DropTop™ desk can be installed at any height that best suits your needs and preferences.

DropTop™ Duo 24 Light
Wall plate height

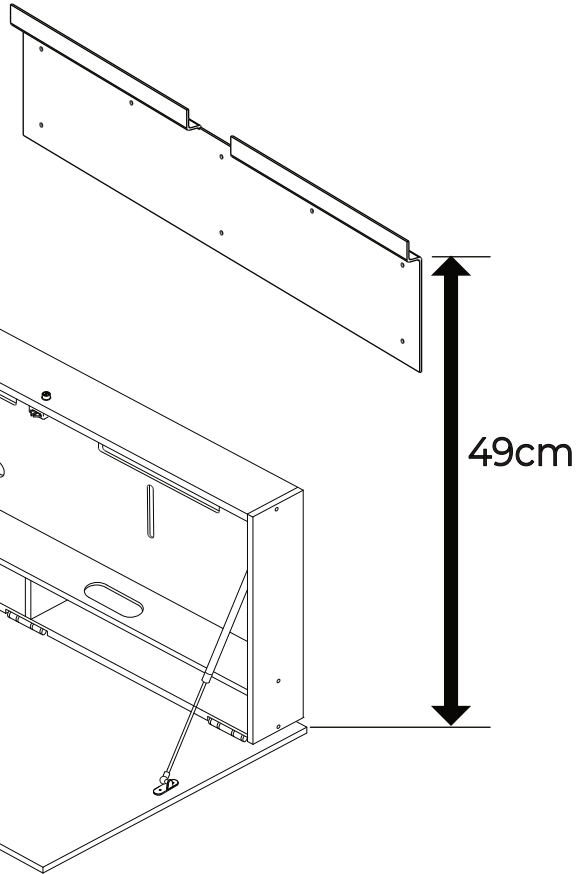


The height to install the wall plate should be measured from the top of the desired desk height to the top of the recessed area of the wall plate.

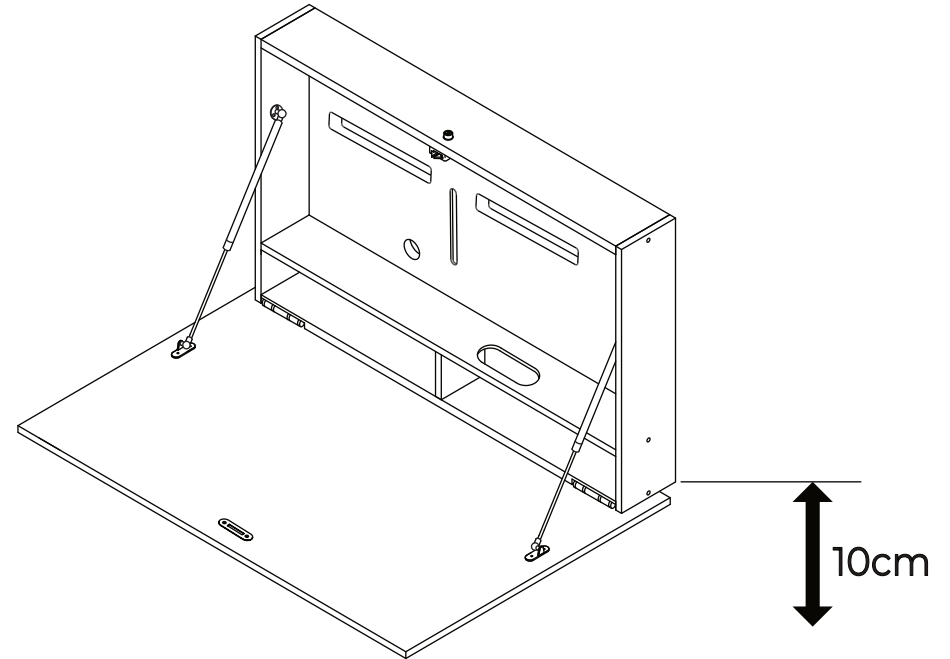

If you plan to mount the DropTop above an item, ensure there is 10 cm of clearance from the base of the DropTop™.

Installing on a brick and concrete wall.


1

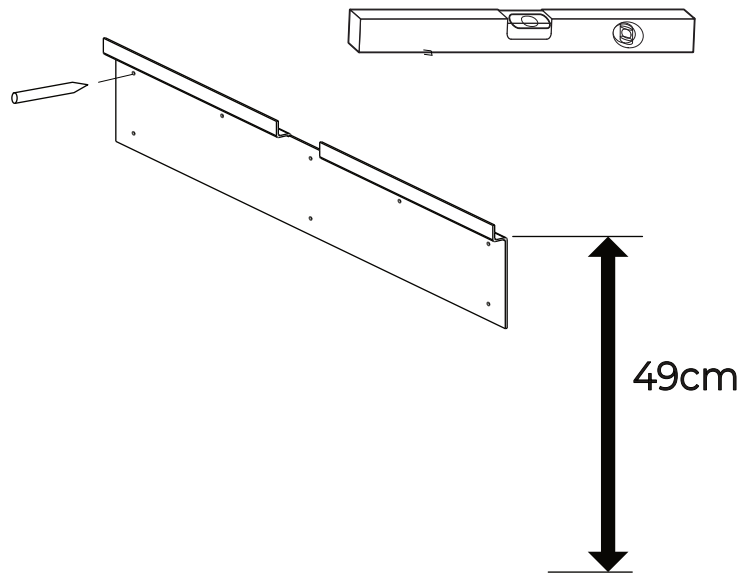

Use the wall plate as a guide and mark the position of the fixing holes with a pencil.

The height to install the wall plate should be measured from the top of the desired desk height to the top of the recessed area of the wall plate as previously explained.


2




Drill 8 x 8mm sized holes at a depth of 90mm (9cm).

3

WALL

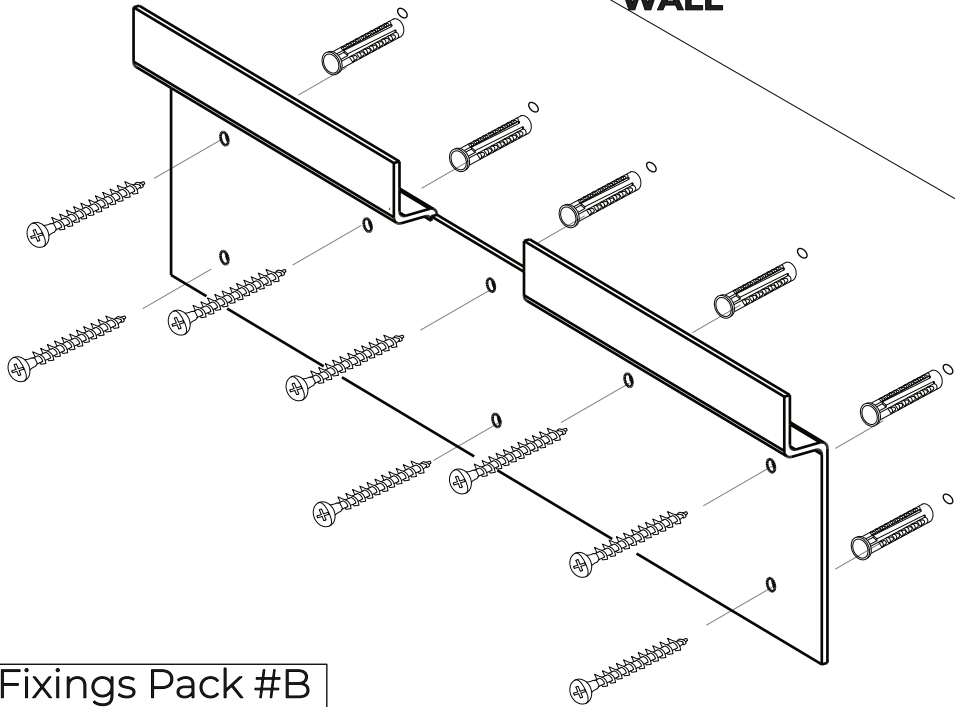


Fixings Pack #B



x8

4


WALL

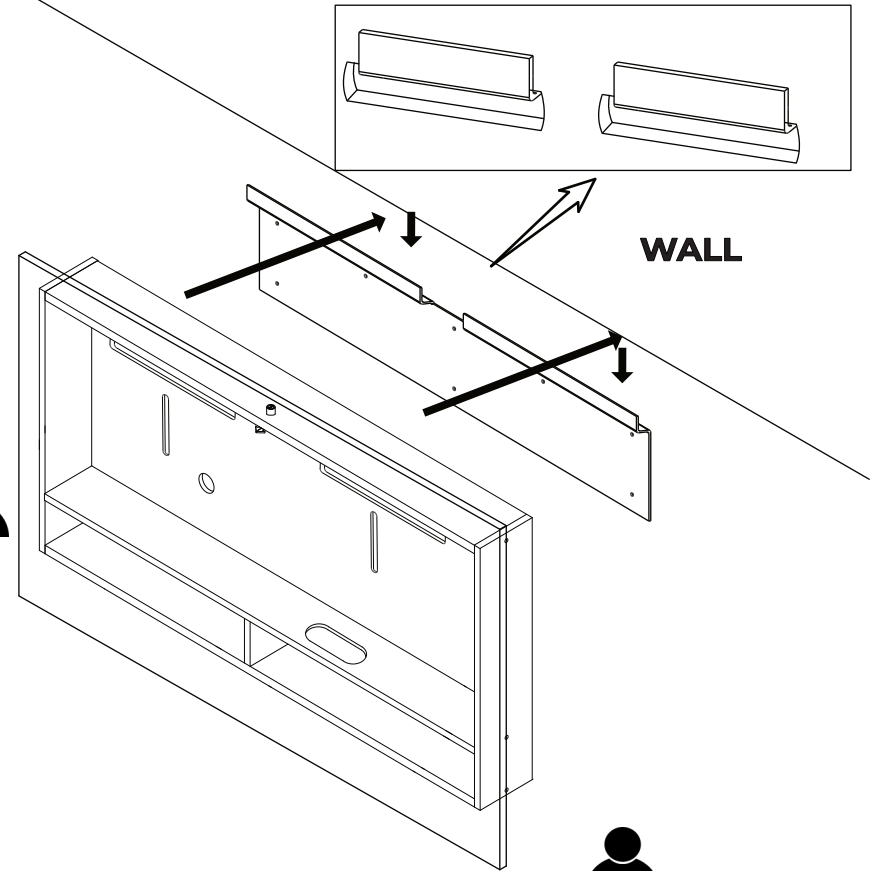

To safely mount the desk, ensure that the DropTop™ is **locked** before lifting it onto the wall plate. The DropTop™ should fit snugly in the recess of the wall plate.

Installing on Plasterboard/Drywall.


1

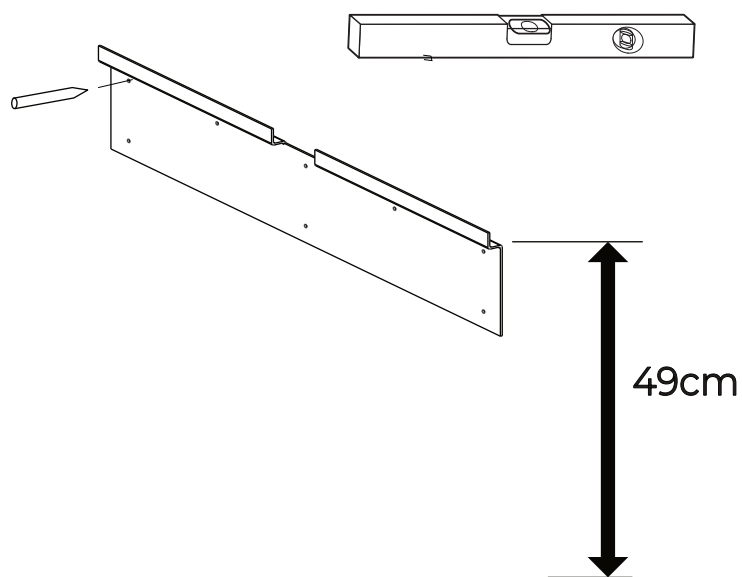


Use the wall plate as a guide and mark the position of the fixing holes with a pencil.

The height to install the wall plate should be measured from the top of the desired desk height to the top of the recessed area of the wall plate as previously explained.

2



**Not included*
Recommended tools




25mm hole saw or a 25mm Spade bit

Using a hole saw, cut 3 holes of 25mm diameter centred on the top row of your wall plate pencil markings for the Geefix.


Drill 5 holes of 8mm diameter for the wall plugs.

3




GeeFix Fixings


Assemble your GeeFix wall anchor system by threading the supplied pullcord through the round wall plug, the curved back plate, and back through the wall plug.




While holding onto the pullcord, feed the curved back plate into the hole and centre on the 25mm hole.




While keeping light tension on the pullcord slide the wall plug into the 1" hole to align with the holes on the back plate.




While keeping firm tension on the pullcord, screw the large screw into the centre hole until the GeeFix becomes firm, but do not over tighten. Keeping tension on the pullcord will keep the back plate in place during installation.



Pull out the pullcord but do not discard. You can use the same pullcord on additional GeeFix.




Screw in the 2 smaller screws on either side of the large screw and tighten until the GeeFix is firmly secured but do not over tighten.





Remove the centre screw

4

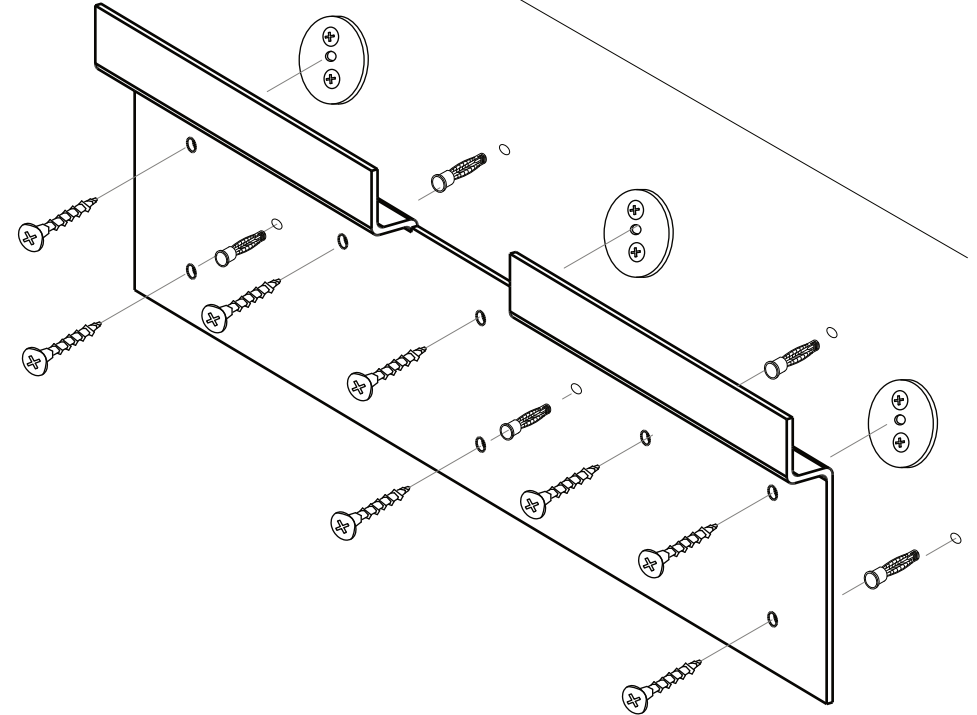

Fixings Pack # A



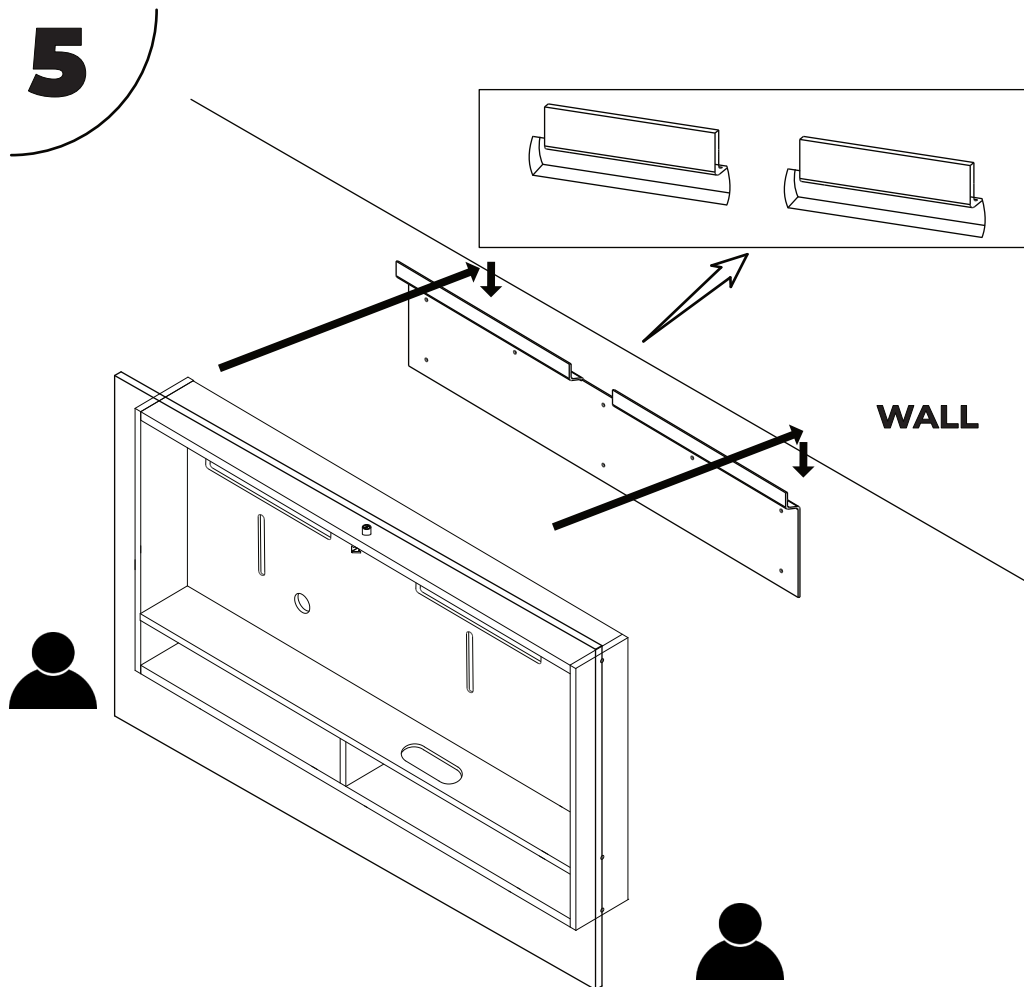


To safely mount the desk, ensure that the DropTop™ is **locked** before lifting it onto the wall plate. The DropTop™ should fit snugly in the recess of the wall plate.

DropTop™ Duo 24 Light

Thank you for choosing to purchase your DropTop™ wall-mounted desk. We are delighted to have you as part of our community. You're taking a wonderful step towards improving your workspace and achieving a better work-life balance. We couldn't be more thrilled to support you in this journey.

Our team has put immense effort into designing and crafting the DropTop™ desk range to ensure it meets the highest standards of quality and functionality. We sincerely hope it transforms your workspace into a more productive and enjoyable environment.

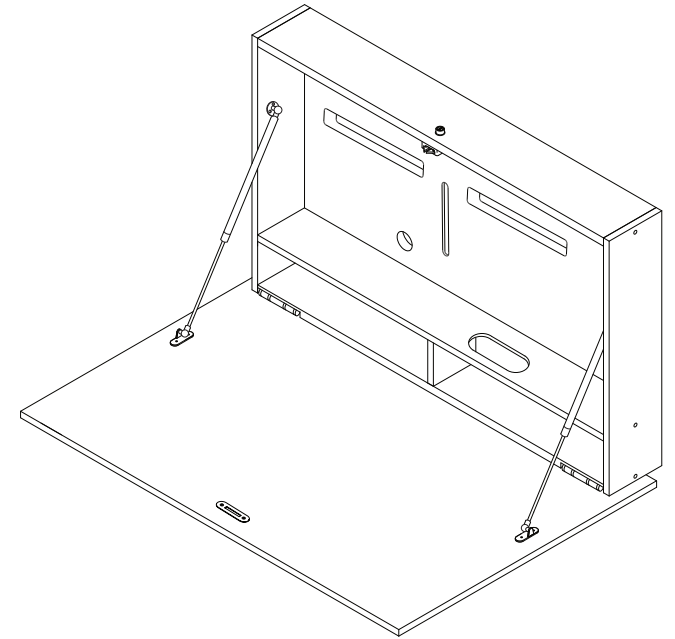

www.pithandstem.com

© 2024 Pith & Stem Ltd. All rights reserved.